

# 2019 **Cineroid**®

Full Color LED Light | Metal LED Light | Flexible LED Light  
Studio LED Light | Location LED Light | On-Camera LED Light  
Electronic Viewfinder | 3G Pattern Generator & Converter | Accessories



CINEROID ALL PRODUCTS : 2019 2<sup>nd</sup> EDITION



LED LIGHT

[www.cineroid.com](http://www.cineroid.com)

## CONTENTS

<b>LED LIGHT</b>	<b>03</b>
Full Color LED Light	— 04
Metal LED Light	— 06
Flexible LED Light	— 08
4 Channel Controller	— 12
On-Camera LED Light	— 14
Location LED Light	— 18
Studio LED Light	— 20
<b>PATTERN GENERATOR &amp; CONVERTER</b>	<b>22</b>
<b>ELECTRONIC VIEWFINDER</b>	<b>24</b>
<b>ACCESSORIES</b>	
Barn Door / Soft Box	— 26
Diffuser / Grid Box	— 27
Extension Cable	— 28
Panel Support	— 28
Ball Head / Hand Grip / Power Adapter	— 29
Battery Mount	— 30
Bag	— 31



## FULL COLOR LED LIGHT

The CL800 RGBW LED Light A Kit from Cineroid is built around the durable, metal CL800 fixture and contains all the components you'll need to get up and running with the system. The kit includes an CL800 panel, with a controller to adjust brightness and color, an AC adapter, a diffuser set, a bracket, and carry bag to store and transport the kit. This version of the kit will run on V-Mount or Gold Mount batteries with separate purchase of a battery plate.

The ballast has color temperature control from 2700 to 6500K with dimming from 0 to 100%. RGB Mode allows you to specify a value for Red, Green, and Blue output, while Hue and Saturation Modes give access to myriad color combinations. The Effect Mode accesses special effects such as Thunder Bolt, Night Club, Camp Fire, Mercury Light, and Moon Light.

# CL800

## FULL COLOR LED LIGHT



### HIGHLIGHTS

- RGBW full range with white light
- Light weight metal panel
- Metal Ballast / CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temperature 2700°K ~ 6500°K
- Extension up to 10 meter
- 100% dimming / DMX Built-in
- Battery charging / Real time synchro
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update

### MODELS

#### CL800 Single Set

- CL800V ( with V-Battery Mount )
- CL800G ( with G-Battery Mount )
- CL800N ( without Battery Mount )

#### CL800 3 Set

- CL800-3V ( with V-Battery Mount )
- CL800-3G ( with G-Battery Mount )
- CL800-3N ( without Battery Mount )



### SPECIFICATIONS

#### LED Panel

Dimension	460 x 240 mm
Weight	600 g
Dimming	0~100%
Photometric	3400 lux
Color Temperature	2700°K ~ 6500°K
LED Cells	2080
CRI	95 or above
Power	120W

#### Metal Ballast

Dimension	170 x 86 x 70 mm
Weight	500 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Color LCD
Cable Length	2m (can be extended)
Control Lock	Yes
DMX	512 Channel
DC Input	11~17 V


### PACKAGE CONTENTS

#### CL800 Single Set

- LED Panel, CL-D(V/G/N), Soft Diffuser, Bracket with spigot, AC Adapter, Carrying Bag, Manual

#### CL800-3 Set


- LED Panel x3, CL-D(V/G/N) x3, Soft Diffuser x3, Bracket with spigot x3, AC Adapter x3, Carrying Bag, Manual

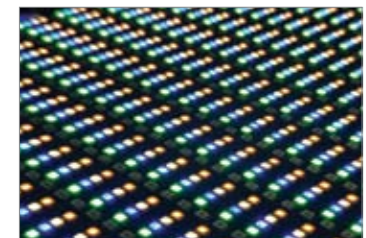

Packed within a conveniently-sized 24cm x 46cm design, there are 2,080 total LED diodes. These are split proportionately between Red, Green, Blue, Tungsten and amp;g new technology. Packed within a conveniently-sized.

# ML800

## METAL LED LIGHT

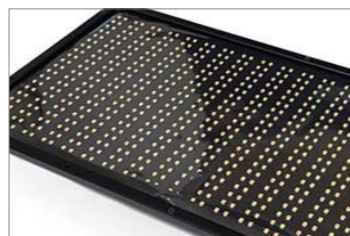

### HIGHLIGHTS

- Durable metal frame / Metal Ballast
- Light weight metal panel
- Color temp 2700°K ~ 6500°K
- Ball mount bracket with 16mm spigot
- CRI 95 or above / DMX Built-in
- 100% dimming / Flicker free
- Battery charging / 3 Preset color temp
- Extension up to 10meter
- Support G or V battery mount
- USB 5V output



### SPECIFICATIONS

#### LED Panel

Material	Metal
Dimension	460 x 240 mm
Weight	580 g
Dimming	0~100%
Photometric	3400 lux
Color Temperature	2700°K ~ 6500°K
LED Cells	800
CRI	95 or above
Consumption	120W

#### Metal Ballast

Dimension	170 x 87 x 50 mm
Weight	350 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
Cable Length	2m (can be extended)
Control Lock	Yes
Consumption	120W
DMX	512 Channel
DC Input	11~17 V

### MODELS

#### ML800 Single Set

- ML800V ( with V-Battery Mount )
- ML800G ( with G-Battery Mount )
- ML800N ( without Battery Mount )

#### ML800 3 Set

- ML800-3V ( with V-Battery Mount )
- ML800-3G ( with G-Battery Mount )
- ML800-3N ( without Battery Mount )

### PACKAGE CONTENTS

#### ML800 Single Set

- LED Panel, FL-D(V/G/N), Soft Diffuser, Metal Bracket with spigot, AC Adapter, Carrying Bag, Manual

#### ML800-3 Set

- LED Panel x3, FL-D(V/G/N) x3, Metal Bracket with spigot x3, Soft Diffuser x3, AC Adapter x3, Carrying Bag, Manual

# FL400

FLEXIBLE LED LIGHT

ENHANCED

## HIGHLIGHTS

- LED Panel of enhanced flexibility
- Color temp 2700°K ~ 6500°K
- 3 Preset color temp
- Flicker free / Control lock
- 100% dimming
- Battery charging Mode
- USB 5V output
- Extension up to 20 meter
- Support G or V battery mount
- Digital Display



## SPECIFICATIONS

### LED Panel

Model	PN-FL400e
Dimension	240 x 240 mm
Weight	160 g
Dimming	0~100%
Photometric	1800 lux
Color Temperature	2700°K ~ 6500°K
LED Cells	400
CRI	95 or above
Consumption	65W

### Metal Ballast

Dimension	170 x 87 x 50 mm
Weight	350 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
Cable Length	2m (can be extended)
Control Lock	Yes
DC Input	11~17 V
DMX	512 Channels

## MODELS

### FL400 Single Set

- FL400V ( with V-Battery Mount )
- FL400G ( with G-Battery Mount )
- FL400N ( without Battery Mount )

### FL400 3 Set

- FL400-3V ( with V-Battery Mount )
- FL400-3G ( with G-Battery Mount )
- FL400-3N ( without Battery Mount )

## PACKAGE CONTENTS

### FL400 Single Set

- FL400 LED Panel, FL-D(V/G/N), Soft Diffuser, Bracket with spigot, AC Adapter, Carrying Bag, Manual

### FL400-3 Set

- FL400 LED Panel x3, FL-D(V/G/N) x3, Soft Diffuser x3, X-Bracket with spigot x3, AC Adapter x3, Carrying Bag, Manual

ENHANCED  
**FLEXIBLE**  
LED LIGHT

FL400 | FL800 | FL1600

The Cineroid flexible LED panel has more coverage than most standard fixtures. Depending on the situation, such as wide or short angle requirements, the FL's shape can be changed as needed. The FL Flexible LED light is waterproof (with the exceptions of Control Box FL and AC power supply). It can be used in situations where the atmosphere is humid or rainy. The surface can even be washed with water.

# FL800

FLEXIBLE LED LIGHT

ENHANCED

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

## HIGHLIGHTS

- LED Panel of enhanced flexibility
- Color temp 2700K ~ 6500K
- 3 Preset color temp / Control lock
- Color temp 2700K ~ 6500K
- 100% dimming / Flicker free
- DMX built-in
- Battery charging Mode
- Digital display / USB 5V output
- Extension up to 10 meter
- Support G or V battery mount



## SPECIFICATIONS

### LED Panel

Model	PN-FL800e
Dimension	460 x 240 mm
Weight	300 g
Dimming	0~100%
Photometric	3400 lux
Color Temperature	2700°K ~ 6500°K
LED Cells	800
CRI	95 or above
Consumption	120W

### Metal Ballast

Dimension	170 x 87 x 50 mm
Weight	350 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
Cable Length	2m (can be extended)
Control Lock	Yes
Consumption	120W
DMX	512 Channel

# FL1600

FLEXIBLE LED LIGHT

ENHANCED

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

## HIGHLIGHTS

- LED Panel of enhanced flexibility
- 6800 lux powerful output
- Color temp 2700°K ~ 6500°K
- Portable ballast with DMX built-in
- CRI 95 or above
- 100% dimming
- Flicker free
- Extension up to 10 meter
- Support G or V battery mount
- DMX Built-in



## SPECIFICATIONS

### LED Panel

Model	PN-FL800e x2
Dimension	920 x 480mm (460 x240)x2mm
Weight	600g x (300g x2)
Dimming	0~100%
Photometric	6800lux (3400lux x2)
Color Temp.	2700°K ~ 6500°K
LED Cells	1600 (800 x2)
CRI	95 or above
Consumption	240W (120w x2)

### Power Controller

Input	AC100~240V 50/60Hz DC 24V(240W)
	2 V-Mount Batteries (FL1600VK only)
Display	Mono LCD
CCT	2700°K ~ 6500°K
Dimming	0~100%
Dimension	360 x 160 x 80 mm
Weight	2010 g
DMX	512 Channel

## MODELS

- FL1600VK ( Ballast with V-Battery Mount )
- FL1600K ( Ballast without Battery Mount )

## MODELS

### FL800 Single Set

- FL800V ( with V-Battery Mount )
- FL800V ( with G-Battery Mount )
- FL800N ( without Battery Mount )

### FL800 3 Set

- FL800-3V ( with V-Battery Mount )
- FL800-3G ( with G-Battery Mount )
- FL800-3N ( without Battery Mount )

## PACKAGE CONTENTS

### FL800 Single Set

- LED Panel, FL-DV(G/N), Soft Diffuser, X-Bracket with spigot, AC Adapter, Carrying Bag, Manual

### FL800-3 Set

- LED Panel x3, FL-DV(G/N) x3, Soft Diffuser x3, X-Bracket with spigot x3, AC Adapter x3, Carrying Bag, Manual

## PACKAGE CONTENTS

### FL1600K

- PN-FL800 x2 / PS800 x2 / SB-FL2 x2/ BL-LM1600S / LM1600(No V-Battery mount) / ECF603 / Controller mount to PS800 / Y Cable

### FL1600VK

- PN-FL800 x2 / PS800 x2 / SB-FL2 x2/ BL-LM1600S / LM1600(V-Battery mount) / ECF603 / Controller mount to PS800 / Y Cable

# CC4

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

## 4 Channel Controller

### HIGHLIGHTS

- Power up 4 x FL400 / FL800 Panels
- 4 Channel with Mono LCD Display
- Master Mode for Grouping
- Dimming from 0~100%
- Color temp 2700°K ~ 6500°K
- Durable Metal Case
- Control Lock Capability
- Convenient Carrying Handle
- Dual Power Sources
- DMX 512 Ready



### SPECIFICATIONS

Dimensions	300 x 190 x 142 mm
Weight	2900 g
Power input	AC 110V/220V (DC 24V)
Dimmer	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
DMX	512 Channel

### PACKAGE CONTENTS


- CC4**
- CC4 Main body
  - Extension cables (3m) x4
  - AC power cable



# CINEROID LED LIGHT

ON-CAMERA LED LIGHT | LOCATION LED LIGHT | STUDIO LED LIGHT

Cineroid LED Lights use high quality LED that can produce excellent color rendering index and 50,000 hours of life span. This LED can produce light without any flickering with stable brightness and color temperature. It can produce balanced and soft color giving The LEDs used in Cineroid lights are rated for 50,000 hours use and have high CRI (Color Rendering Index) values. They provide a uniformly soft light for natural tones in both photo and video use.

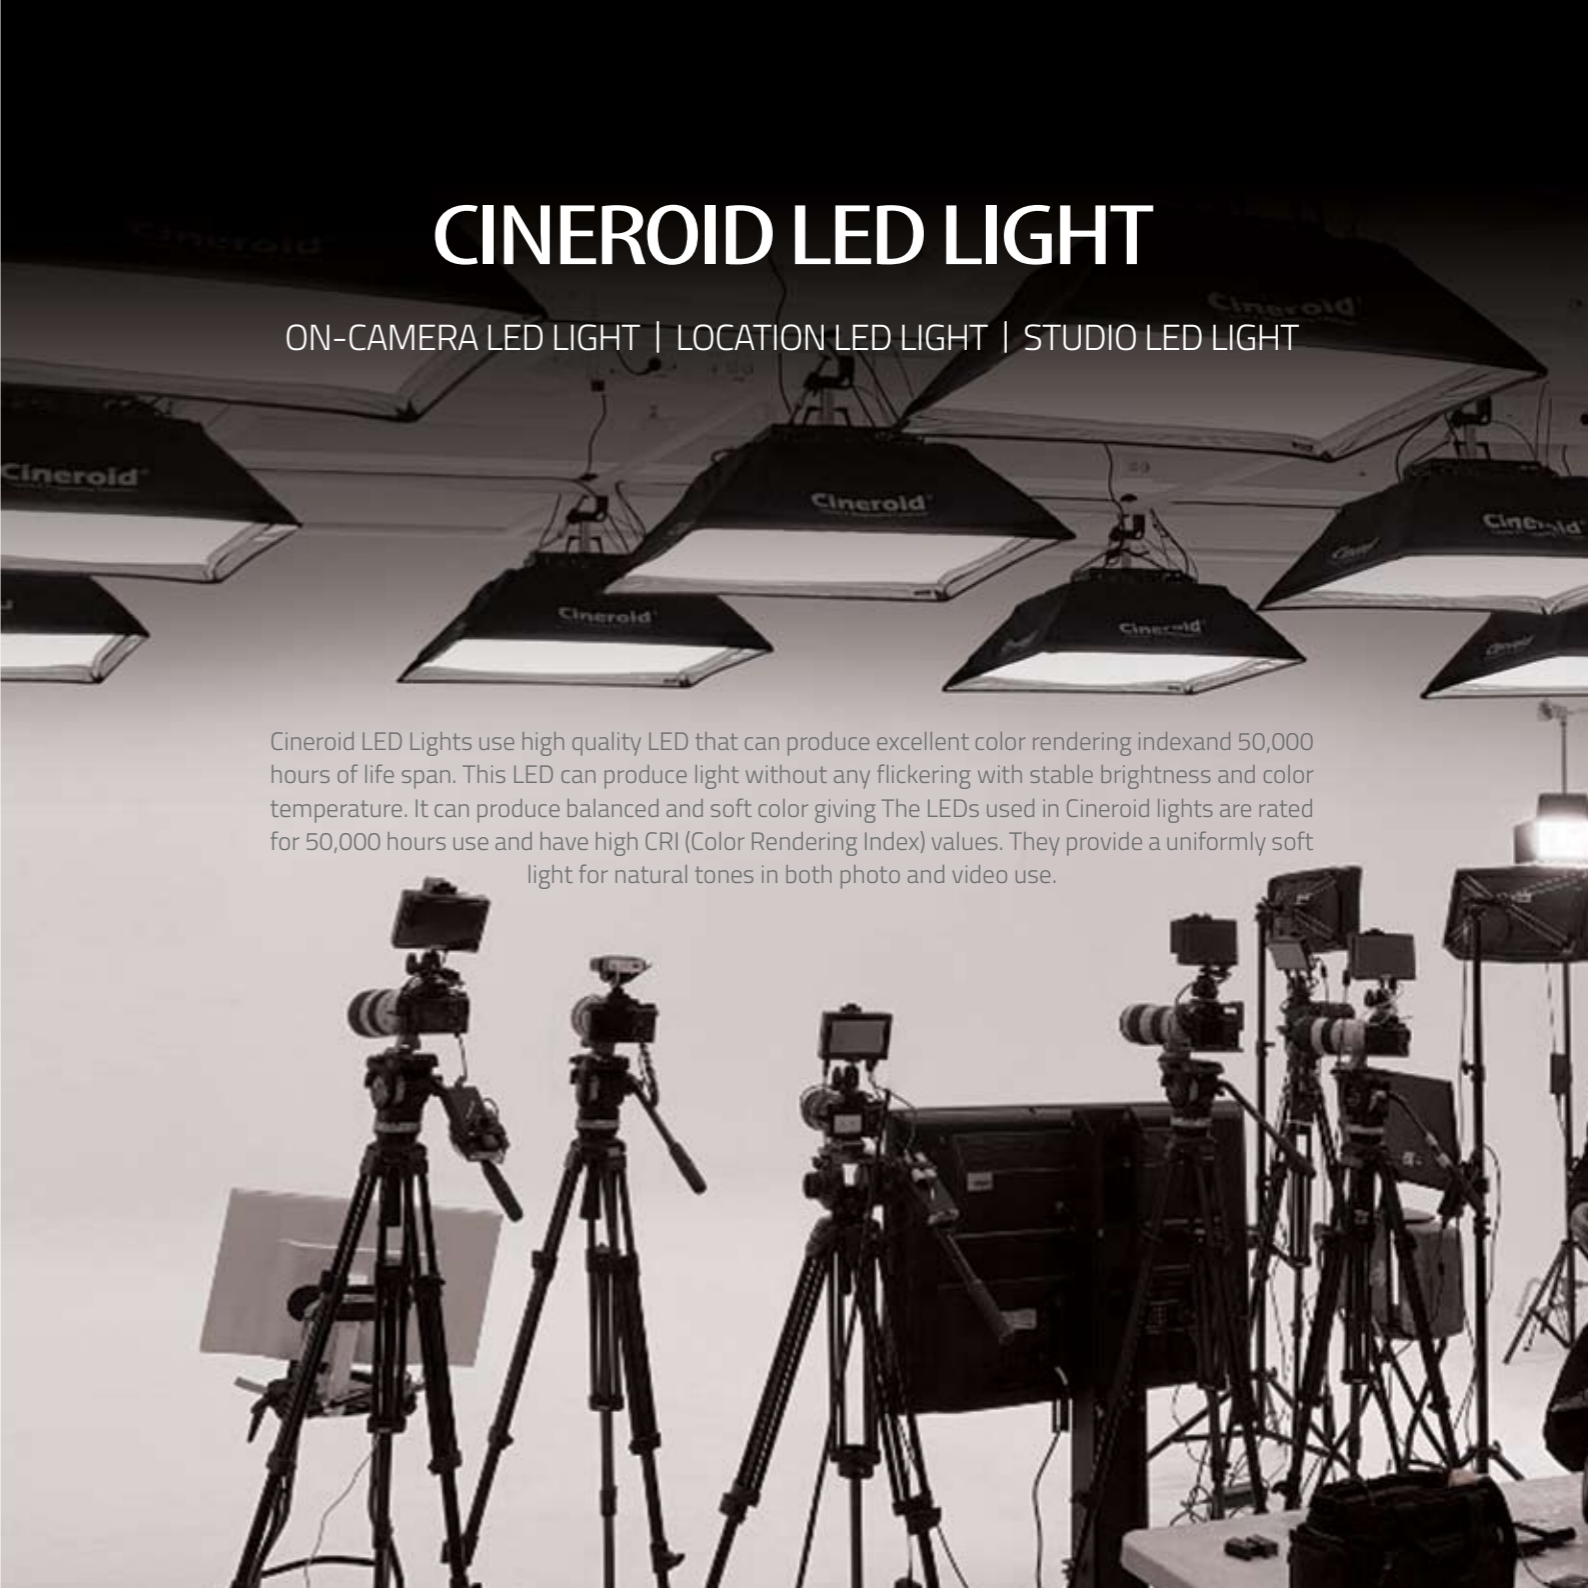

# LM200

## ON-CAMERA LIGHT

### HIGHLIGHTS

- Compact Size
- Light weight
- 0~100% dimming
- Color temp 2700K~ 6500K
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Various Power Options
- Various Accessories Support



### SPECIFICATIONS

Dimensions	150 x 90 x 35 mm
Weight	281 g
Dimming	0~100 %
Color Temperature	2700°K~6500°K
Consumption	30 W
Power input	6~17 V
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	900 Lux

### MODLES & PACKAGE CONTENTS

#### LM200-VCD

- LM200-VC body, Diffuser, NPF-L battery dual mount, PA05, Mini ball head, Carrying Bag, Manual

#### LM200-3 Kit

- LM200-VC body x3, Diffuser x3, NPF-L battery dual mount x3, Mini ball head x3, NPF type battery charger x3, Manual



# L10C-VCe

## ON-CAMERA LIGHT

### HIGHLIGHTS

- Compact Size
- Lightweight
- 0~30 Step Brightness
- Color temperature 2700°K~6500°K
- Digital Display
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Various Accessories Support



### SPECIFICATIONS

Dimensions	92 x 82 x 25 mm
Weight	160
Brightness	0~30 Step
Color Temperature	2700°K~6500°K
Consumption	18 W
Power input	6~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	420 Lux

### PACKAGE CONTENTS

#### L10C-VCe

- L10C-VCe body, Battery mount, Mini ball head, Honey comb, Manual

#### L10C-VCeS

- L10C-VCe Main body, Battery mount, Mini ball head, Honey comb, Battery, Battery charger, Carrying Bag, Manual



### MODLE

#### L10C-VCe Basic Set

- L10C-VCe

#### L10C-VCe Full Set

- L10C-VCeS

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

# L10-BC

## ON-CAMERA LIGHT

### HIGHLIGHTS

- Compact Size
- Lightweight
- 0~100% Dimming
- Color temperature 2700°K~6500°K
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Various Accessories Support



### SPECIFICATIONS

Dimensions	92 x 82 x 25 mm
Weight	160
Dimming	0~100 %
Color Temperature	2700°K~6500°K ±200°K
Consumption	16 W
Power input	6~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	420 Lux

### PACKAGE CONTENTS

#### L10-BC

- L10-BC body
- Battery mount
- Mini ball head
- Manual



**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment



# LM400

## LOCATION LED LIGHT



### HIGHLIGHTS

- Location LED Light
- Durable Metal Body
- Variable Color Temperature
- Compatible with V/G mount battery
- DMX Ready
- 0~100% dimming
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System

### MODLE

- LM400 Single Set
  - LM400-VCBB
- LM400 3 Set
  - LM400-3SBB



### SPECIFICATIONS

Dimensions	191 x141 x 25 mm
Weight	562 g
Dimming Control	0~100 %
Color Temperature	2700°K~6500°K
Consumption	60 W
Power Input	11~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	16mm female spigot
External Power	D-tap cable
Photometric	1800 Lux

### PACKAGE CONTENTS

- LM400-VCBB
  - LM400-VCe body, Yoke, Diffuser, AC Adapter, Carrying Bag, Manaul
- LM400-3SBB
  - LM800-VCD body x3, Yoke x3, Diffuser x3, AC Adapter x3, Carrying Bag, Manaul



# LM800

## LOCATION LED LIGHT



### HIGHLIGHTS

- Location LED Light
- Durable Metal Body
- Variable Color Temperature
- Compatible with V/G mount battery
- DMX Ready
- 0~100% dimming
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System



### SPECIFICATIONS

Dimensions	242 x192 x 26 mm
Weight	990 g
Dimming Control	0~100 %
Color Temperature	2700°K~6500°K
Consumption	120 W
Power Input	11~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	16mm female spigot
External Power	D-tap cable
Photometric	3400 Lux

### PACKAGE CONTENTS

- LM800-VCBB
  - LM800-VCD body
  - Yoke
  - Diffuser
  - AC Adapter
  - Carrying Bag
  - Manaul



# LS800i

## STUDIO LED LIGHT

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

### HIGHLIGHTS

- Studio Light
- Durable Metal Body
- 0~100% Dimming
- DMX Ready
- Digital Display
- Variable Color Temperature
- Flicker-Free
- Silent Cooling System
- Various Power Options
- 16mm Spigot



### SPECIFICATIONS

Dimensions	360 x 150 x 32 mm
Weight	1610 g
Dimming Control	0~100 %
Color Temperature	2700°K~6500°K ±200°K
Consumption	110 W
Light Angle	120 degree
Mount	1/4" screw mount
External Power	3400 Lux
DMX	512 Channel

### PACKAGE CONTENTS

#### LS800i

- LS800i Main body
- Power Cable
- Barn Door
- Diffuser
- Yoke
- Manual



# LS1600i

## STUDIO LED LIGHT

**Cineroid**<sup>®</sup>  
Cinema & Broadcasting Equipment

### HIGHLIGHTS

- Studio Light
- Durable Metal Body
- 0~100% Dimming
- DMX Ready
- Digital Display
- Variable Color Temperature
- Flicker-Free
- Silent Cooling System
- Various Power Options



### SPECIFICATIONS

Dimensions	653 x 150 x 32 mm
Weight	2950 g
Dimming Control	0~100 %
Color Temperature	2700°K~6500°K ±200°K
Consumption	230 W
Light Angle	120 degree
Mount	1/4" screw mount
Photometric	8000 Lux
DMX	512 Channel

### PACKAGE CONTENTS

#### LS1600

- LS1600i Main body
- Power Cable
- Barn Door
- Diffuser
- Yoke
- Manual



# PG32e

## PATTERN GENERATOR & CONVERTER



### HIGHLIGHTS

- 3G/HD/SD-SDI Converter
- Waveform & Vector Scope
- 480 x 800 Display
- Durable Metal Body
- Audio Features
- Portable Design
- P2I Mode / Real Time Monitor
- 16 types Pattern Generator
- Loopout Cable Tester
- Various Power Options



### Pattern Generator



PG32 features a built-in 3.2" display on the front of the unit. It gives an immediate visual confirmation of the test patterns output and be a simple quick video confidence monitor.

### SPECIFICATIONS

Input	HDMI x1 / HD-SDI x1
Output	HDMI x1 / HD-SDI x2 / HD-SDI Loop out x1
LCD Size	3.2 inch
LCD Resolution	480 x 800
LCD Colour	16.7 M
LCD Viewing angle	H: 140, V: 140 (degrees)
LCD Display area	41.76 x 69.6 mm

Audio level meter	3.5Ø Analog Stereo
Internal speaker	Mono Output
Battery	Multi vendor Battery Support
External Power	DC 6.0~17V
Operating Temp.	-10°C to 70°C
Power consumption	3.5 W
Weight	340 g
Size	130 x 101 x 28 mm

### PACKAGE CONTENTS

- PG-32e Body
- D-tap to mini XLR cable
- Battery holder mount
- Canon LP-E6 Battery holder
- Canon BP911 Battery holder
- Sony NPF Battery holder
- User manual

# EVF4RVW

## ELECTRONIC VIEW FINDER

### HIGHLIGHTS

- High Resolution Display
- 3G/HD/SD-SDI
- Openable / Detachable Optical Loupe
- Connecting External Power
- Multi vendor Battery Support
- Wheel Control
- Audio Level Meter
- Adjusting the Diopter for Loupe
- Included Extension Tube for Loupe
- Firmware Upgrade



### MAJOR FEATURES

- WAVEFORM
- VECTOR SCOPE
- PEAKING
- PIXEL TO PIXEL
- MONOCHROME
- CLIP GUIDE(ZEBRA)
- CLIP GUIDE(COLOR)
- FALSE COLOR
- UNDER SCAN
- CROPE GUIDE
- SCREEN FLIP

### SPECIFICATIONS

Input	HDMI
Output	HDMI / HD-SDI
Dimensions	201 x 67 x 157 mm
LCD Size	3.5 inch
LCD Resolution	960 x 640 Pixel
LCD Color	16.7 M
LCD Viewing angle	140(H)/140(V) degrees
LCD Display Area	69.6(H)x41.76(V)mm

Audio Phone Jack	3.5Ø Analog Stereo
Internal Speaker	Mono Output
Battery	Multi vendor Battery Support
External Power	DC 6.0~17V
Operating Temp.	-10°C to 70°C
Storage Temp.	-20°C to 70°C
Power	5W
Weight	400 g

### PACKAGE CONTENTS

- LCD VF+Optical Loupe
- Mini Ball Head
- Extension Tube
- PA04
- Battery Mount NPF-L Type
- Battery Mount Base
- Battery Holder for Canon LP-E6,
- Battery Holder for Canon BP-911
- Carrying bag / Manual



High Resolution display includes an ambient light sensor that allows for automatic screen brightness adjustment for optimum viewing in environments ranging from darkness to sunlight.

## LED Light Accessoires

## Barn Door



BD08M : Barn door for LM800

BD01  
: Barn door for L10BD02  
: Barn door for LM200BD04  
: Barn door for LM400

## Diffuser

LD-FL800  
: Soft diffuser Set for FL800 (ML800 / CL800)LD-11  
Diffuser for L10LD-4M  
Snap-in diffuser for LM400 (rail type)LD-8M  
Snap-in diffuser  
for LM800LD-FL400  
Soft diffuser Set for FL400

## Soft Box



SB-FL2x2 : Softbox for support panel 2 unit

SB-LM400  
: Soft box for LM400SB-FL2x1  
: Softbox for support panel 1 unitSB-FL4x2  
: Softbox for support panel 4 unit

## Grid Box

GD-FL400  
Grid for FL400GD-FL800  
Grid for FL800  
(ML800 / CL800)GD-LM400  
Grid for SB-LM400GD-FL2x1  
Grid for SB-FL2x1GD-FL2x2  
Grid for SB-FL2x2GD-FL4x2  
Grid for SB-FL4x2

Cable & Panel Support

Extension Cable



ECF405 : 5m 4pin extension cable for FL400 / FL800



ECF403  
3m 4pin extension cable  
for FL400 / FL800



ECF410  
10m 4pin extension cable  
for FL400 / FL800



ECF603  
3m 6pin extension cable  
for LM1600 / CL800



ECF610  
10m 6pin extension cable  
for LM1600 / CL800

Panel Support



PS800 : Support panel for Flexible LED light



Supporting & Power Source

Ball Head & Hand Grip Plate



HG-FL : Hand grip for Panel support for PS800



BL-FLS  
Ball head for Panel support  
with 16mm spigot



BL-FLR  
Ball head for Panel support  
with Rod



BL-LM1600S  
Ball head for LM1600 with  
16mm spigot



BL-LM1600R  
Ball head for LM1600  
with Rod

Power Adapter



PA06 : 2 pin with D-tap for FL400 / FL800 /  
ML800 / CL800



PA04  
mini XLR to D-tap Cable  
for EVF4RVW/PG32e



PA05  
DC Plug with D-tap Cable  
for LM400/LM200/LM800



FCB043  
DC plug with D-tap cable  
for L10 / EVF4C



FCB044  
DC plug only cable

Power Source & Bag

Battery Mount



**YCS079**  
: LM200 mount for NPF L series



**BH-BP808**  
: Battery Holder for Canon BP808 series



**YCS048**  
L10/L2 battery mount for NPF L series



**BH-LM400V**  
V battery mount for LM400 Light



**YAS019**  
Battery mount base for L10/L2/PG32



**BH-ENEL15**  
Battery holder for Nikon EN-EL15



**BH-BP911**  
Battery holder for Canon BP-911 series



**YCS074**  
L10/L2 mount for Sony BPU30/60



**BH-LM400G**  
G battery mount for LM400 Light



**YAS020**  
Battery mount base for EVF4RVW



**BH-NPF**  
NPF L Battery holder for EVF4RVW



**BH-D54SE**  
Battery holder for Panasonic D54S



**BH-LM800G2**  
L10/L2 battery mount for NPF L series



**BH-LM800V2**  
Dual V battery mount for LM800



**YAS021**  
NPF L Battery mount for EVF4RVW



**BH-LPE6**  
Battery holder for Canon LP-E6

Bag



**QBG009**  
: Carrying bag for LM400 3 units



**QBG001**  
Carrying bag for EVF4RVW, L10, LM200



**QBG011**  
Carrying bag for FL400 single set



**QBG004**  
Carrying bag for LM400, LM200 3 set



**QBG012**  
Carrying bag for FL800 single set



**QBG008**  
Carrying bag for LM800 FL400 3 Set



**QBG015**  
Carrying bag for FL800 3 set

Compatible Signals (Input / Output)



**PG32e**  
Pattern Generator & Converter

**Input (HDMI/HD-SDI)**  
1080@60P, 1080@59.94P, 1080@50P, 1080@30P, 1080@29.97P, 1080@25P, 1080@24P, 1080@23.98P, 1080@30PsF, 1080@29.97PsF, 1080@25PsF, 1080@24PsF, 1080@23.98PsF, 1080@60i, 1080@59.94i, 1080@50i, 720@60P, 720@59.94P, 720@50P, 720@30P, 720@29.97P, 720@25P, 720@24P, 720@23.98P, 576@50P, 576@50i, 480@60P, 480@59.94P, 480@59.94i

**Output (HDMI/HD-SDI)**  
1080@60P, 1080@59.94P, 1080@50P, 1080@30P, 1080@29.97P, 1080@25P, 1080@24P, 1080@23.98P, 1080@30PsF, 1080@29.97PsF, 1080@25PsF, 1080@60i, 1080@59.94i, 1080@50i, 720@60P, 720@59.94P, 720@50P, 576@50i, 480@59.94i




**EVF4RVW**  
Electronic Viewfinder

**Input (HDMI/HD-SDI)**  
480@59.94p, 480@59.94i, 576@50p, 576@50i, 720@50p, 720@59.94p, 720@60p, 1080@23.98p, 1080@24p, 1080@25p, 1080@29.97PsF, 1080@29.97p, 1080@30PsF, 1080@30p, 1080@P, 1080@30p, 1080@50i, 1080@50p, 1080@59.94i, 1080@59.94p, 1080@60p

**Output (HD-SDI)**  
480@59.94p, 480@59.94i, 576@50p, 576@50i, 720@50p, 720@59.94p, 720@60p, 1080@23.98p, 1080@24p, 1080@25p, 1080@29.97PsF, 1080@29.97p, 1080@30PsF, 1080@30p, 1080@P, 1080@30p, 1080@50i, 1080@50p, 1080@59.94i, 1080@59.94p, 1080@60p



# Cineroid LED Light Comparison Chart

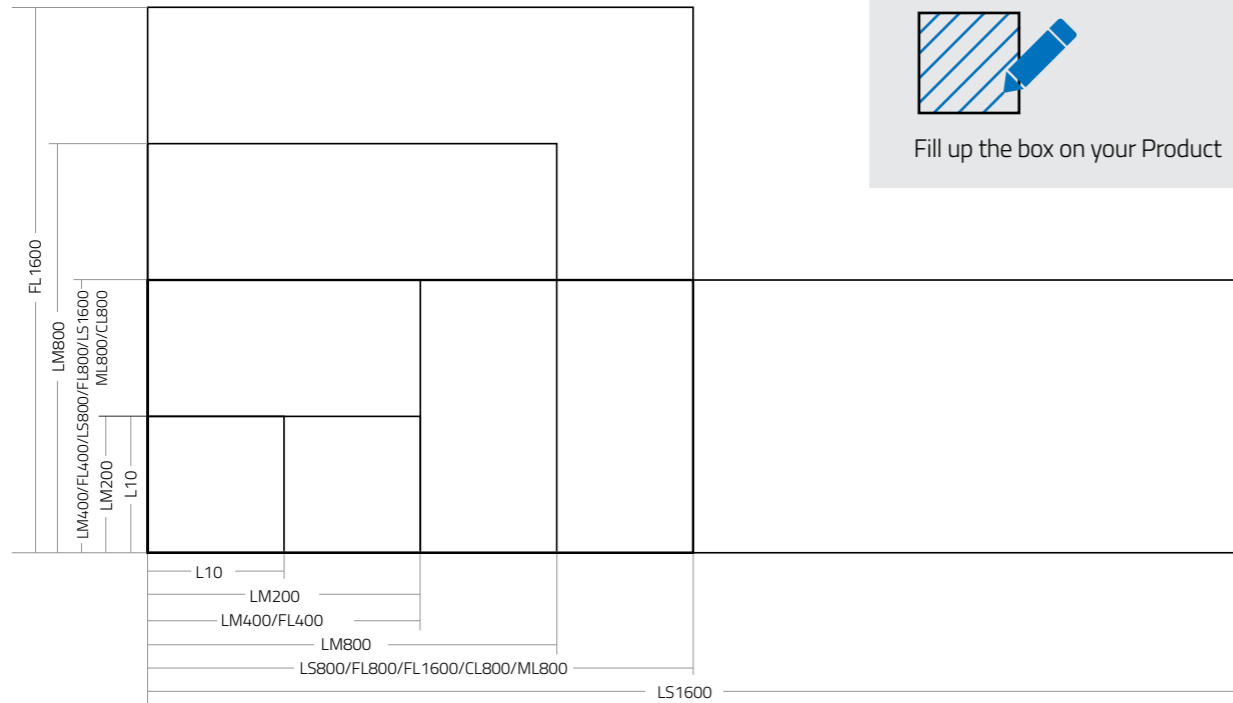

Model	Panel Surface	LED Cells	Photometric	Consumption
L10C-BC	92 X 82 mm	120	420 Lux	16 W
L10C-VCe	92 X 82 mm	96	420 Lux	18 W
LM200	150 X 90 mm	192	900 Lux	30 W
LM400	191 x141 mm	384	1800 Lux	60 W
FL400	240 x 240 mm	400	1800 Lux	65 W
LM800	242 x192 mm	768	3400 Lux	120 W
FL800	460 x 240 mm	800	3400 Lux	120 W
LS800	360 x150 mm	800	3400 Lux	110 W
ML800	455 x 235 mm	800	3400 Lux	120 W
CL800	455 x 235 mm	2000	3400 Lux	120 W
FL1600	460 x 480 mm	1600	8000 Lux	240 W
LS1600	653 x 150 mm	1600	8000 Lux	230 W



# **Cineroid**<sup>®</sup>

Cinema & Broadcasting Equipment

SECULINE CO., Ltd

Tel. +82.70.4347.4901 Fax. +82.70.4347.4999 E-mail. sales@secu-line.com

Rm 1105, Ace techno tower 8th, 11, Digital-ro 33-gil, Guro-gu, Seoul, Republic of Korea 08380



[www.cineroid.com](http://www.cineroid.com)



[facebook](#)