

Cineroid® 40

Flexible LED Light | Studio LED Light | Location LED Light
On-Camera LED Light | 3G Pattern Generator & Converter
Electronic Viewfinder | Accessories | Cineroid App on mobile

CINEROID ALL PRODUCTS : 2020 1ST EDITION





Get Started on Cineroid® App



Use the cine Android applications can still be used to control some lighting products CINEROID. Cineroid app provides product information, manuals, etc. You can download Android from Google Play and iPhone from App Store.



Contents

LED LIGHT

Flexible	CFL1600	4
	CFL800	6
	CFL400	7
	FL800	8
	FL400	9
Studio	STD400C	10
	STD300C	11
	STD400	12
	STD300	13
	LS1600i	14
	LS800i	15
Location	LM400	16
	LM200	17
On-Camera	L10C-VCe	18
	L10C-BC	19
4 Channel Controller	CC4	20

PATTERN GENERATOR & CONVERTER

PG-32e	22
--------	----

ELECTRONIC VIEW FINDER

EVF4RVW	24
---------	----

ACCESSOIRES

Barn Door / Soft Box	25
Diffuser / Grid Box	26
Extension Cable	27
Panel Support	28
Ball Head / Hand Grip	29
Power Adapter	29
Battery Mount	30
Bag	31



CFL1600

FLEXIBLE LED LIGHT



HIGHLIGHTS

- RGBWW Full color light
- Flexible LED Panel
- Metal Controller / CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- Extension up to 8 meter
- 100% dimming / DMX Built-in
- Custom effect / 6 Preset reserve
- USB 5V output
- USB Firmware update

MODEL & CONTNETS

- CFL1600V

CFL1600 LED Panel, Controller, Diffuser, Metal Bracket, Handle grip with 16mm spigot, AC Cable, Manual, Carrying Bag



SPECIFICATIONS

LED Panel

Dimension	895 x 240 mm
Weight	600 g
Light Sources	RGBWW
CRI	95 or above
CCT	2700°K ~ 6500°K
LED Cells	4160
Cooling	Passive cooling

Controller

Dimension	102 x 175 x 200mm
Weight	2.1 kg
Dimming	0~100%
Display	Color LCD
Cable Length	3 meters
DMX	512 Channel
AC Input	100~240 V

Power out

White	240 W
Red	240 W
Green	240 W
Blue	240 W
Photometric	6500 Lux



Accessible Cineroid Application on mobile

Use the cine Android applications can still be used to control some lighting products CINEROID. Cineroid app provides product information, manuals, etc.

CFL800



FLEXIBLE LED LIGHT



HIGHLIGHTS

- RGBWW Full color light
- Flexible LED Panel
- Metal Controller / CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- Extension up to 10 meter
- 100% dimming / DMX Built-in
- Custom effect
- 6 Preset reserve
- USB 5V output / USB Firmware update



SPECIFICATIONS

LED Panel

Dimension	460 x 240 mm
Weight	300 g
Dimming	0~100%
Photometric	3400 lux
CCT	2700°K ~ 6500°K
Light Sources	RGBWW
LED Cells	2080
CRI	95 or above

Controller

Dimension	170 x 86 x 70 mm
Weight	500 g
Dimming	0~100%
Display	Color LCD
Cable Length	2m (can be extended)
DMX	512 Channel
DC Input	11~17 V
Power (R/G/B/W)	120W

MODEL & CONTNETS

- FL800V ○ FL800G ○ FL800N

LED Panel, Controller, Soft diffuser, Metal Bracket with spigot, AC Adapter, Manual, Carrying Bag

- FL800-3V ○ FL800-3G ○ FL800-3N

LED Panel x3, Controller x3, Soft diffuser x3, Metal Bracket with spigot x3, AC Adapter x3, Manual, Carrying Bag

CFL400



FLEXIBLE LED LIGHT



HIGHLIGHTS

- RGBWW Full color light
- Flexible LED Panel
- Metal Controller / CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- Extension up to 10 meter
- 100% dimming / DMX Built-in
- Custom effect
- 6 Preset reserve
- USB 5V output / USB Firmware update



SPECIFICATIONS

LED Panel

Dimension	240 x 240 mm
Weight	160 g
Dimming	0~100%
Photometric	1800 lux
CCT	2700°K ~ 6500°K
Light Sources	RGBWW
LED Cells	1040
CRI	95 or above

Controller

Dimension	170 x 86 x 70 mm
Weight	500 g
Dimming	0~100%
Display	Color LCD
Cable Length	2m (can be extended)
DMX	512 Channel
DC Input	11~17 V
Power (R/G/B/W)	65 W

MODEL & CONTNETS

- CFL400V ○ CFL400G ○ CFL400N

LED Panel, Controller, Soft diffuser, Metal Bracket with spigot, AC Adapter, Manual, Carrying Bag

- CFL400-3V ○ CFL400-3G ○ CFL400-3N

LED Panel x3, Controller x3, Soft diffuser x3, Metal Bracket with spigot x3, AC Adapter x3, Manual, Carrying Bag

FL800

FLEXIBLE LED LIGHT



HIGHLIGHTS

- LED Panel of enhanced flexibility
- Color temp 2700°K ~ 6500°K
- 3 Preset color temp
- Flicker free / Control lock
- 100% dimming
- Extension up to 10 meter
- 100% dimming / DMX Built-in
- Battery charging
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



SPECIFICATIONS

LED Panel

Model	PN-FL800e
Dimension	460 x 240 mm
Weight	300 g
Dimming	0~100%
Photometric	3400 lux
CCT	2700°K ~ 6500°K
LED Cells	800
CRI	95 or above
Light Sources	Bi-Color

Controller

Dimension	170 x 87 x 50 mm
Weight	350 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
Cable Length	3m (can be extended)
Control Lock	Yes
Consumption	120W
DMX	512 Channel

MODEL & CONTNETS

- FL800V ◦FL800G ◦FL800N

LED Panel, Controller, Soft diffuser, Metal Bracket with spigot, AC Adapter, Manual, Carrying Bag

- FL800-3V ◦FL800-3G ◦FL800-3N

LED Panel x3, Controller x3, Soft diffuser x3, Metal Bracket with spigot x3, AC Adapter x3, Manual, Carrying Bag

FL400

FLEXIBLE LED LIGHT



HIGHLIGHTS

- LED Panel of enhanced flexibility
- Color temp 2700°K ~ 6500°K
- 3 Preset color temp
- Flicker free / Control lock
- 100% dimming
- Extension up to 10 meter
- 100% dimming / DMX Built-in
- Battery charging
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



SPECIFICATIONS

LED Panel

Model	PN-FL400e
Dimension	240 x 240 mm
Weight	160 g
Dimming	0~100%
Photometric	1800 lux
CCT	2700°K ~ 6500°K
LED Cells	400
CRI	95 or above
Light Sources	Bi-Color

Controller

Dimension	170 x 87 x 50 mm
Weight	350 g
Dimming	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
Cable Length	3m (can be extended)
Control Lock	Yes
DC Input	11~17 V
DMX	512 Channels

MODEL & CONTNETS

- CFL400V ◦CFL400G ◦CFL400N

LED Panel, Controller, Soft diffuser, Metal Bracket with spigot, AC Adapter, Manual, Carrying Bag

- CFL400-3V ◦CFL400-3G ◦CFL400-3N

LED Panel x3, Controller x3, Soft diffuser x3, Metal Bracket with spigot x3, AC Adapter x3, Manual, Carrying Bag

STD400C



STUDIO LED LIGHT

HIGHLIGHTS

- 400W Power each R,G,B,W
- RGBWW Full color LED light
- Metal Body
- CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- 100% dimming / DMX Built-in
- USB 5V output
- USB Firmware update
- Detachable Built-in Barn door



SPECIFICATIONS

Model	STD400C
Color	RGBWW
Color Temp.	2700°K ~ 6500°K
CRI	96
Photometric	10000 Lux / 1m
TLCI	96~98
Power	400 W
Demensions	50 x 50 x 12 cm
Weight	6.5 kg

MODEL & CONTNETS

- STD400C

STD400C body, Barn door, Ball head,
Power Cable



STD400

STUDIO LED LIGHT

HIGHLIGHTS

- 400W Power
- Bi-Color LED light
- Metal Body
- CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- 100% dimming
- DMX Built-in
- Detachable Built-in Barn door



SPECIFICATIONS

Model	STD400
Color	Bi-Color
Color Temp.	2700°K ~ 6500°K
CRI	96
Photometric	10000 Lux / 1m
TLCI	96~98
Power	400 W
Demensions	50 x 50 x 12 cm
Weight	6.5 kg

MODEL & CONTNETS

- STD400

STD400 body, Barn door, Ball head,
Power Cable



STD300C

STUDIO LED LIGHT

HIGHLIGHTS

- 300W Power each R,G,B,W
- RGBWW Full color LED light
- Metal Body
- CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- 100% dimming / DMX Built-in
- USB 5V output
- USB Firmware update
- Detachable Built-in Barn door



SPECIFICATIONS

Model	STD300C
Color	RGBWW
Color Temp.	2700°K ~ 6500°K
CRI	96
Photometric	8000 Lux / 1m
TLCI	96~98
Power	300 W
Demensions	60 x 40 x 12 cm
Weight	6 kg

MODEL & CONTNETS

- STD300C

STD300C body, Barn door, Ball head,
Power Cable



STD300

STUDIO LED LIGHT

HIGHLIGHTS

- 300W Power
- Bi-Color LED light
- Metal Body
- CRI 95 or above
- Ball mount bracket with 16mm spigot
- Color temp 2700K ~ 6500K
- 100% dimming
- DMX Built-in
- Detachable Built-in Barn door



SPECIFICATIONS

Model	STD300
Color	Bi-Color
Color Temp.	2700°K ~ 6500°K
CRI	96
Photometric	8000 Lux / 1m
TLCI	96~98
Power	300 W
Demensions	60 x 40 x 12 cm
Weight	6 kg

MODEL & CONTNETS

- STD300

STD300 body, Barn door, Ball head,
Power Cable



LS1600i

STUDIO LED LIGHT



HIGHLIGHTS

- Studio Light
- Durable Metal Body
- 0~100% Dimming
- DMX Ready
- Digital Display
- Variable Color Temperature
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Detachable Built-in Barn door



SPECIFICATIONS

Dimension	653 x 150 x 32mm
Weight	2950 g
Dimming Control	0~100 %
CCT	2700°K~6500°K ±200°K
Consumption	230 W
Light Angle	120 degree
Mount	1/4" screw mount
External Power	6000 Lux
DMX	512 Channel

MODEL & CONTNETS

- LS1600i

LS1600i Main body, Power Cable, Barn Door, Diffuser, Yoke, Manaul

LS800i

STUDIO LED LIGHT



HIGHLIGHTS

- Studio Light
- Durable Metal Body
- 0~100% Dimming
- DMX Ready
- Digital Display
- Variable Color Temperature
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Detachable Built-in Barn door



SPECIFICATIONS

Dimension	360 x 150 x 32mm
Weight	1610 g
Dimming Control	0~100 %
CCT	2700°K~6500°K ±200°K
Consumption	110 W
Light Angle	120 degree
Mount	1/4" screw mount
External Power	3400 Lux
DMX	512 Channel

MODEL & CONTNETS

- LS800i

LS800i Main body, Power Cable, Barn Door, Diffuser, Yoke, Manaul

LM400

LOCATION LED LIGHT



HIGHLIGHTS

- Location LED Light
- Durable Metal Body
- Variable Color Temperature
- Compatible with V/G mount battery
- DMX Ready
- 0~100% dimming
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System



SPECIFICATIONS

Dimensions	191 x141 x 25 mm
Weight	562 g
Dimming Control	0~100 %
Color Temperature	2700°K~6500°K
Consumption	60 W
Power Input	11~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	16mm female spigot
External Power	D-tap cable
Photometric	1800 Lux

MODEL & CONTNETS

◦ LM400-VCBB

LM400-VCe body, Yoke, Diffuser, AC Adapter, Carrying Bag, Manual

◦ LM400-3SBB

LM800-VCD body x3, Yoke x3, Diffuser x3, AC Adapter x3, Carrying Bag, Manual



LM400-3SBB

LM200

ON-CAMERA LED LIGHT



HIGHLIGHTS

- Compact Size
- Light weight
- 0~100% dimming
- Color temp 2700K~ 6500K
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Various Power Options
- Various Accessories Support



SPECIFICATIONS

Dimensions	150 x 90 x 35 mm
Weight	281 g
Dimming	0~100 %
Color Temperature	2700°K~6500°K
Consumption	30 W
Power input	6~17 V
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	900 Lux

MODEL & CONTNETS

◦ LM200-VCD

LM200-VC body, Diffuser, NPF-L battery dual mount, PA05, Mini ball head, Carrying Bag, Manual

◦ LM200-3 Kit

LM200-VC body x3, Diffuser x3, NPF-L battery dual mount x3, Mini ball head x3, NPF type battery charger x3, Manual



LM200-3 Kit

L10-VCe

ON-CAMERA LED LIGHT

HIGHLIGHTS

- Compact Size
- Lightweight
- 0~30 Step Brightness
- Color temperature 2700°K~6500°K
- Digital Display
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Various Accessories Support



SPECIFICATIONS

Dimensions	92 x 82 x 25 mm
Weight	160
Brightness	0~30 Step
Color Temperature	2700°K~6500°K
Consumption	18 W
Power input	6~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	420 Lux

MODEL & CONTNETS

○ L10C-VCe

L10C-VCe body, Battery mount, Mini ball head, Honey comb, Manual

○ L10-VCeS

L10C-VCe Main body, Battery mount, Mini ball head, Honey comb, Battery, Battery charger, Carrying Bag, Manual



L10-BC

ON-CAMERA LED LIGHT

HIGHLIGHTS

- Compact Size
- Lightweight
- 0~100% Dimming
- Color temperature 2700°K~6500°K
- Flicker-Free
- Silent Cooling System
- Various Power Options
- Various Accessories Support



SPECIFICATIONS

Dimensions	92 x 82 x 25 mm
Weight	160
Dimming	0~100 %
Color Temperature	2700°K~6500°K ±200°K
Consumption	16 W
Power input	6~17 V
Battery	Multi vendor battery support
Light Angle	120 degree
Mount	1/4" screw mount
External Power	D-tap cable
Photometric	420 Lux

MODEL & CONTNETS

○ L10-BC

L10-BC body, Battery mount, Mini ball head, Manual



CC4

4 CHANNEL CONTROLLER



HIGHLIGHTS

- Power up 4 x FL400 / FL800 Panels
- 4 Channel with Mono LCD Display
- Master Mode for Grouping
- Dimming from 0~100%
- Color temp 2700°K ~ 6500°K
- Durable Metal Case
- Control Lock Capability
- Convenient Carrying Handle
- Dual Power Sources
- DMX 512 Ready



SPECIFICATIONS

Dimensions	300 x 190 x 142 mm
Weight	2900 g
Power input	AC 110V/220V (DC 24V)
Dimmer	0~100%
CCT	2700°K ~ 6500°K
Display	Mono LCD
DMX	512 Channel

MODEL & CONTNETS

○ CC4

- CC4 Main body
- Extension cables (3m) x4
- AC power cable

Cineroid®
LED LIGHT SYSTEM

Cineroid LED Lights use high quality LED that can produce excellent color rendering index and 50,000 hours of life span. This LED can produce light without any flickering with stable brightness and color temperature. It can produce balanced and soft color giving The LEDs used in Cineroid lights are rated for 50,000 hours use and have high CRI (Color Rendering Index) values. They provide a uniformly soft light for natural tones in both photo and video use.



PG-32e

PATTERN GENERATOR & CONVERTER



HIGHLIGHTS

- 3G/HD/SD-SDI Converter
- Waveform & Vector Scope
- 480 x 800 Display
- Durable Metal Body
- Audio Features
- P2I Mode
- Real Time Monitor
- 16 types Pattern Generator
- Loopout Cable Tester
- Various Power Options



PATTERN GENERATOR



PG32 features a built-in 3.2" display on the front of the unit. It gives an immediate visual confirmation of the test patterns output and be a simple quick video confidence monitor.



SPECIFICATIONS

Input	HDMI x1 / HD-SDI x1
Output	HDMI x1 / HD-SDI x2 / HD-SDI Loop out x1
LCD Size	3.2 inch
LCD Resolution	480 x 800
LCD Colour	16.7 M
LCD Viewing angle	H: 140, V: 140 (degrees)
LCD Display area	41.76 x 69.6 mm

Audio level meter	3.5Ø Analog Stereo
Internal speaker	Mono Output
Battery	Multi vendor Battery Support
External Power	DC 6.0~17V
Operating Temp.	-10°C to 70°C
Power consumption	3.5 W
Weight	340 g
Size	130 x 101 x 28 mm

MODEL & CONTNETS

- PG-32e

PG-32e Body, D-tap to mini XLR cable
Battery holder mount, Canon BP911
Battery holder, Sony NPF Battery holder,
User manual

EVF4RVW

ELECTRONIC VIEW FINDER

HIGHLIGHTS

- High Resolution Display
- 3G/HD/SD-SDI
- Openable / Detachable Optical Loupe
- Connecting External Power
- Multi vendor Battery Support
- Wheel Control
- Audio Level Meter
- Adjusting the Diopter for Loupe
- Included Extension Tube for Loupe
- Firmware Upgrade



SPECIFICATIONS

Input	HDMI / HD-SDI
Output	HD-SDI
Dimensions	201 x 67 x 157 mm
LCD Size	3.5 inch
LCD Resolution	960 x 640 Pixel
LCD Color	16.7 M
LCD Viewing angle	140(H)/140(V) degrees
LCD Display Area	69.6(H)x41.76(V)mm

Audio Phone Jack	3.5Ø Analog Stereo
Internal Speaker	Mono Output
Battery	Multi vendor Battery Support
External Power	DC 6.0~17V
Operating Temp.	-10°C to 70°C
Storage Temp.	-20°C to 70°C
Power	5W
Weight	400 g

MAJOR FEATURES

- WAVEFORM
- VECTOR SCOPE
- PEAKING
- PIXEL TO PIXEL
- MONOCHROME
- CLIP GUIDE(ZEBRA)
- CLIP GUIDE(COLOR)
- FALSE COLOR
- UNDER SCAN
- CROPE GUIDE
- SCREEN FLIP

MODEL & CONTNETS

- EVF4RVW

LCD VF+Optical Loupe, Mini Ball Head, Extension Tube, PA04, Battery Mount NPF-L Type, Battery Mount Base, Battery Holder for Canon LP-E6, Battery Holder for Canon BP-911, Carrying bag, Manual



High Resolution display includes an ambient light sensor that allows for automatic screen brightness adjustment for optimum viewing in environments ranging from darkness to sunlight.

LED Light Accessoires

Barn Door



BD01
: Barn door for L10



BD02
: Barn door for LM200



BD04
: Barn door for LM400

Diffuser



LD-11
: Diffuser for L10



LD-FL400
: Soft diffuser Set for FL400



LD-FL800
: Soft diffuser Set for FL800 (ML800 / CL800)

Soft Box



SB-FL2x2 : Softbox for support panel 2 unit



SB-LM400
: CL800 LED Panel only



SB-FL2x1
: Softbox for support panel 1 unit



SB-FL4x2
: Softbox for support panel 4 unit

Grid Box



GD-FL4x2 : Grid for SB-FL4x2



GD-FL400
Grid for FL400



GD-FL800
Grid for FL800
(ML800 / CL800)



GD-FL2x1
Grid for SB-FL2x1



GD-FL2x2
Grid for SB-FL2x2

LED Light Accessoires

Extension Cable



ECF1603 : 3m 6 pin extension cable for CFL1600



ECF403
3m 4 pin extension cable for FL800



ECF405
5m 4 pin extension cable for FL800



ECF603
3m 6 pin extension cable for LM1600



ECF605
5m 6 pin extension cable for LM1600

Ball Head & Hand Grip Plate



HG-LM1600 : Hand grip for LM1600



BL-FLS
Ball head for Panel support with 16mm spigot



BL-FLR
Ball head for Panel support with Rod



BL-LM1600S
Ball head for LM1600 with 16mm spigot



BL-LM1600R
Ball head for LM1600 with Rod

Panel Support



PS800 : Support panel for Flexible LED light



Power Adapter



PA06 : 2 pin with D-tap for FL400 / ML800



PA04
mini XLR to D-tap Cable for EVF4RVW/PG32e



PA05
DC Plug with D-tap Cable for LM400/LM200



FCB043
DC plug with D-tap cable for L10



FCB044
DC plug only cable

Power Source & Bag

Battery Mount



YCS079
: LM200 mount for NPF L series



BH-BP808
: Battery Holder for Canon BP808 series



YCS048
L10/L2 battery mount for NPF L series



BH-LM400V
V battery mount for LM400 Light



YAS019
Battery mount base for L10/L2/PG32



BH-ENEL15
Battery holder for Nikon EN-EL15



BH-BP911
Battery holder for Canon BP-911 series



YCS074
L10/L2 mount for Sony BPU30/60



BH-LM400G
G battery mount for LM400 Light



YAS020
Battery mount base for EVF4RVW



BH-NPF
NPF L Battery holder for EVF4RVW



BH-D54SE
Battery holder for Panasonic D54S



BH-LM800G2
L10/L2 battery mount for NPF L series



BH-LM800V2
Dual V battery mount for LM800



YAS021
NPF L Battery mount for EVF4RVW



BH-LPE6
Battery holder for Canon LP-E6

Bag



QBG009
: Carrying bag for LM400 3 units



QBG001
Carrying bag for EVF4RVW, L10, LM200



QBG011
Carrying bag for FL400 single set



QBG004
Carrying bag for LM400, LM200 3 set



QBG012
Carrying bag for FL800 single set



QBG008
Carrying bag for LM800 FL400 3 Set



QBG015
Carrying bag for FL800 3 set

Compatible Signals (Input / Output)



PG32e
Pattern Generator & Converter

Input
(HDMI/HD-SDI)
1080@60P, 1080@59.94P, 1080@50P, 1080@30P, 1080@29.97P, 1080@25P, 1080@24P, 1080@23.98P, 1080@30PsF, 1080@29.97PsF, 1080@25PsF, 1080@24PsF, 1080@23.98PsF, 1080@60i, 1080@59.94i, 1080@50i, 720@60P, 720@59.94P, 720@50P, 720@30P, 720@29.97P, 720@25P, 720@24P, 720@23.98P, 576@50P, 576@50i, 480@60P, 480@59.94P, 480@59.94i

Output
(HDMI/HD-SDI)
1080@60P, 1080@59.94P, 1080@50P, 1080@30P, 1080@29.97P, 1080@25P, 1080@24P, 1080@23.98P, 1080@30PsF, 1080@29.97PsF, 1080@25PsF, 1080@60i, 1080@59.94i, 1080@50i, 720@60P, 720@59.94P, 720@50P, 576@50i, 480@59.94i




EVF4RVW
Electronic Viewfinder

Input
(HDMI/HD-SDI)
480@59.94p, 480@59.94i, 576@50p, 576@50i, 720@50p, 720@59.94p, 720@60p, 1080@23.98p, 1080@24p, 1080@25p, 1080@29.97PsF, 1080@29.97p, 1080@30PsF, 1080@30p, 1080@P, 1080@30p, 1080@50i, 1080@50p, 1080@59.94i, 1080@59.94p, 1080@60p

Output
(HD-SDI)
480@59.94p, 480@59.94i, 576@50p, 576@50i, 720@50p, 720@59.94p, 720@60p, 1080@23.98p, 1080@24p, 1080@25p, 1080@29.97PsF, 1080@29.97p, 1080@30PsF, 1080@30p, 1080@P, 1080@30p, 1080@50i, 1080@50p, 1080@59.94i, 1080@59.94p, 1080@60p

Cineroid LED Light Comparison Chart

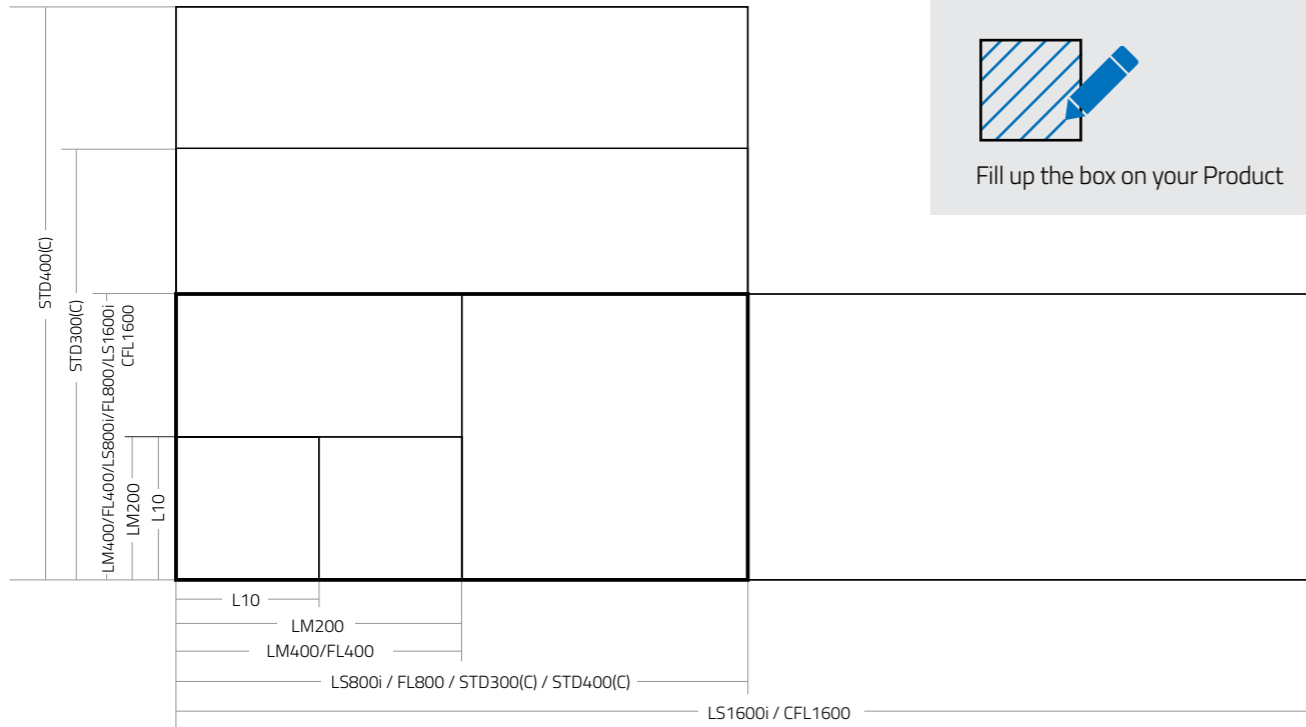

Model	Panel Surface	LED Cells	Photometric	Consumption
CFL1600	92 X 82 mm	4160	6500 Lux	240 W
CFL800	92 X 82 mm	2080	3400 Lux	120 W
CFL400	150 X 90 mm	1040	1800 Lux	65 W
FL800	240 x 240 mm	800	3400 Lux	120 W
FL400	460 x 240 mm	400	1800 Lux	65 W
STD400C	460 x 460 mm	4160	3400 Lux	120 W
STD400	460 x 460 mm	1600	3400 Lux	120 W
STD300C	460 x 240 mm	3120	3400 Lux	110 W
STD300	460 x 240 mm	1200	3400 Lux	120 W
LM400	191 x141 mm	384	1800 Lux	60W
LM200	150 X 90 mm	192	900 Lux	30W
L10C-VCe	92 X 82 mm	96	420 Lux	16 W
L10C-BC	92 X 82 mm	120	420 Lux	18 W



Cineroid[®]

Cinema & Broadcasting Equipment

SECULINE CO., Ltd

Tel. +82.70.4347.4901 Fax. +82.70.4347.4999 E-mail. sales@secu-line.com

Rm 1105, Ace techno tower 8th, 11, Digital-ro 33-gil, Guro-gu, Seoul, Republic of Korea 08380



www.cineroid.com



[facebook](#)