




Cineroid®

Flexible LED Light | Studio LED Light | All-in-One LED Light
PAR LED Light | Multi-Panel Light | On-Camera LED Light
Cineroid DMX Bridge | Accessories

Cineroid All Products : 2022 2nd Edition

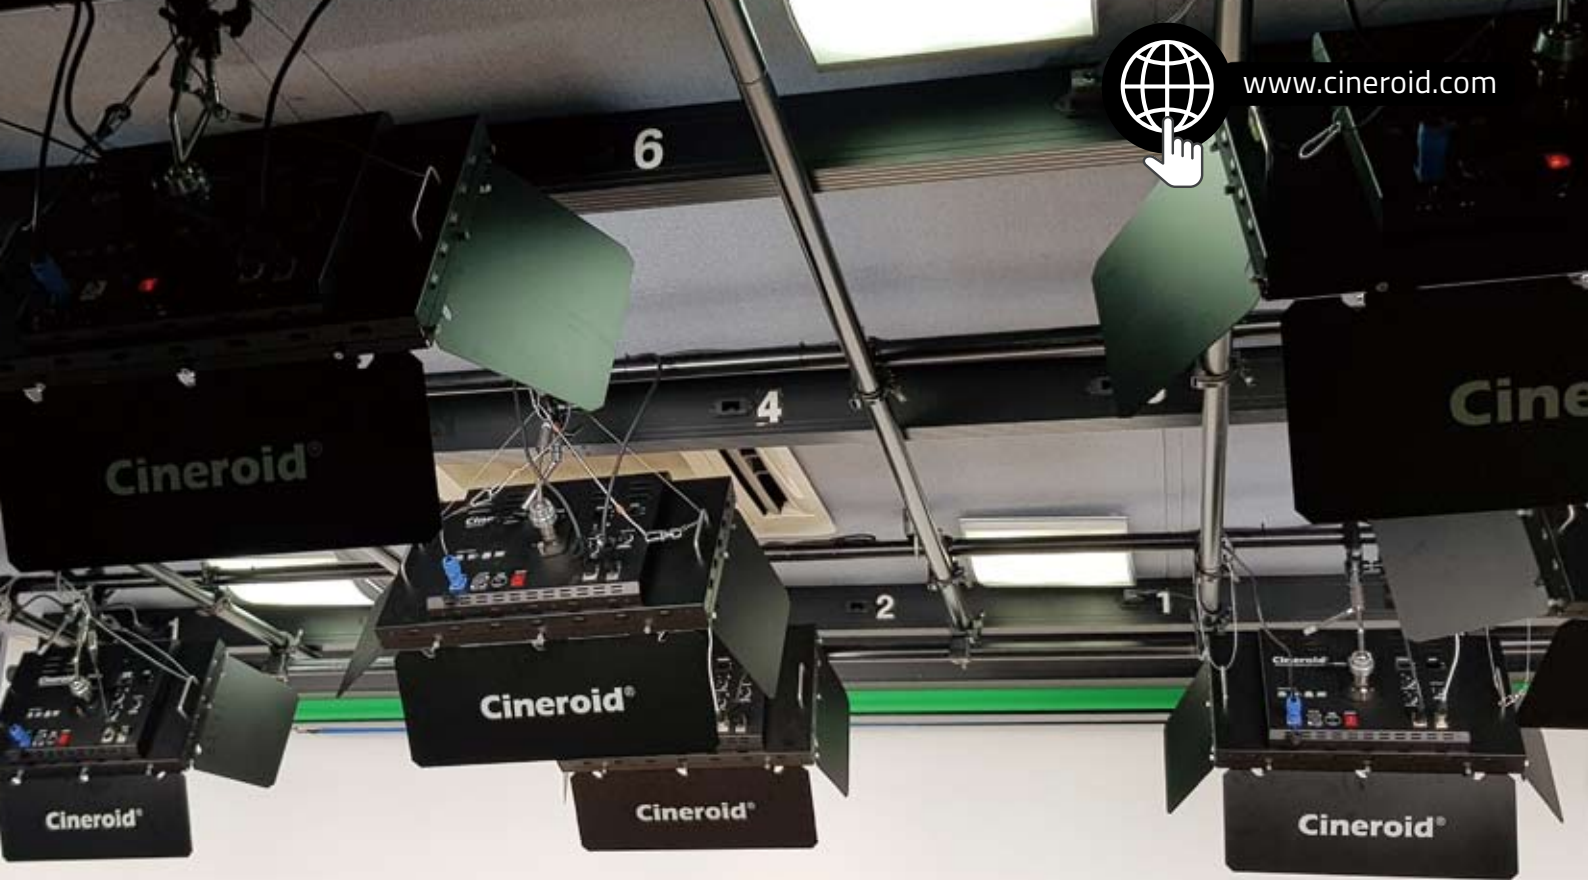

LED LIGHT

Flexible		CFL250	4
		CFL800	6
		CFL400	7
		FL250	8
		FL800	10
		FL400	11
Metal		CML250	12
		ML250	14
Studio		STD250C	16
		STD250	17
		LS1600i	18
		LS800i	19
PAR		PL120	20
All-in-one		LM400	22
		SL45	23
4 Channel Controller		CC4	24
Multi-Panel		TL120	25
On-Camera		LM200	26
		L10-BC	27

DMX Bridge

	BD001U	28
	Uni Studio	29

ACCESSOIRES

Barn Door / Soft Box		30
Diffuser / Grid Box		31
Extension Cable		32
Snap-in Clamp		32
Ball Head / Hand Grip		33
Power Adapter		33
Battery Mount / Adapter		34
Bag		34
Cineroid LED Light Configuration		35

Cineroid LED Light Comparison Chart

Classification by Watt

240-250W Power Consumption

Power	Type	CCT	Model	Photometric (Lux)	Remark	Catalog Page
250W	Flexible	RGBWW	CFL250	1m:6,024 2m:1,752 3m:875		5
		Bi-Color	FL250	1m:5,749 2m:1,663 3m:830		9
	Metal	RGBWW	CML250B	1m:4,711 2m:1,260 3m:644	Barndoor	12
			CML250S	1m:4,650 2m:1,046 3m:471	Soft box	13
		Bi-Color	ML250B	1m:4,466 2m:1,724 3m:531	Barndoor	14
			ML250S	1m:4,032 2m:892 3m:532	Soft Box	15
	Studio	RGBWW	STD250C	1m:4,424 2m:1,283 3m:619		16
		Bi-Color	STD250	1m:4,308 2m:1,250 3m:603		17
240W	Studio	Bi-Color	LS1600i	1m:5,972 2m:1,612 3m:770		18

120W Power Consumption

Power	Type	CCT	Model	Photometric (Lux)	Remark	Catalog Page
120W	Flexible	RGBWW	CFL800V	1m:2,806 2m:829 3m:381		6
		Bi-Color	FL800V	1m:2,635 2m:698 3m:348		10
	Studio	Bi-Color	LS800i	1m:2,943 2m:860 3m:410		19
	PAR	Bi-Color	PL120V	1m:18,299 2m:6,634 3m:2,617	with diffuser Light Angle 120°	20
				1m:4,056 2m:1,155 3m:578	without diffuser Light Angle 28°	

60W Power Consumption

Power	Type	CCT	Model	Photometric (Lux)	Remark	Catalog Page
60W	Flexible	RGBWW	CFL400V	1m:1,973 2m:531 3m:241		7
		Bi-Color	FL400V	1m:2,204 2m:577 3m:268		11
	All-in-one	Bi-Color	LM400	1m:1,514 2m:378 3m:182		23

18-36W Power Consumption

Power	Type	CCT	Model	Photometric (Lux)	Remark	Catalog Page
36W	On-Camera	Bi-Color	LM200-VC	1m:566 2m:196 3m:77		24
18W	On-Camera	Bi-Color	L10-BC	1m:296		25



RGBWW / Bi-Color LED Light



Controller CB250C



RGBWW full color with white



Bracket for quick installation



Durable soft box

CFL250

FULL COLOR FLEXIBLE LED LIGHT **250 W**



FLEXIBLE
LED LIGHT

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

○ CFL250

* V battery mount is optional item <BH-CB250V>

LED Panel	<PN-CFL250>	Flexible RGBWW panel (250W)
Controller	<CB250C>	Controller 250W RGBWW
Bracket	<YAS028>	X bracket for CFL/FL250 flexible panel
Snap-in Clamp	<YAS032>	Snap-in clamp set
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Cable	<ECF1603>	3m 6 pin extension cable
Soft Box	<SB-FL250>	Softbox for 250W flexible
Bag	<QBG015>	Bag for Flexible 250 a unit

Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 90x24 cm (35.2x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.6 kg (1.3 lb) Controller: 1.8 kg (4 lb)

CFL800

FULL COLOR FLEXIBLE LED LIGHT 120 W

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

◦ CFL800V	* Optional accessories available: Softbox <SB-FL800>, Grid<GD-SB800>	
LED Panel	<PN-CFL800>	RGB Flexible 800 Panel (120W)
Controller	<CL-DV>	Controller CFL400/800 with V mount
Bracket	<YAS026>	X bracket for CFL/FL800 flexible panel
Snap-in Clamp	<YAS032>	Snap-in Clamp set
Cable	<ECF602>	2m 6pin extension cable
Soft Diffuser	<LD-FL800>	Soft diffuser Set for FL800 (for Flexible Light)
Bag	<QBG012>	Bag for FL800 a unit
◦ CFL800-3V	* 3 light kit available in exclusive bag (QBG015)	

Specifications RGBTD

Light Sources	RGBWW Flexible LED Panel
Consumption	120 W
Photometric (lux)	1m:2,806 2m:829 3m:381
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 46x24 cm (18.1x9.5 inch) Controller: 18x9x6 cm (7x3.5x2.4 inch)
Weight	Panel: 0.3 kg (0.7 lb) Controller: 0.6 kg (1.4 lb)

CFL400

FULL COLOR FLEXIBLE LED LIGHT 60 W

Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 60W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

○ CFL400V	* Optional accessories available: Softbox <SB-FL400>, Grid<GD-SB400>	
LED Panel	<PN-CFL400>	RGB Flexible 400 Panel (60W)
Controller	<CL-DV>	Controller CFL400/800 with V mount
Bracket	<YAS025>	X bracket for CFL/FL400 flexible panel
Snap-in Clamp	<YAS032>	Snap-in Clamp set
Cable	<ECF602>	2m 6pin extension cable
Soft Diffuser	<LD-FL400>	Soft diffuser Set for FL400 (for Flexible Light)
Bag	<QBG011>	Bag for FL400 a unit
○ CFL400-3V	* 3 light kit available in exclusive bag (QBG009)	

Specifications

Light Sources	RGBWW Flexible LED Panel
Consumption	60 W
Photometric (lux)	1m:1,973 2m:531 3m:241
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 24x24 cm (9.5x9.5 inch) Controller: 18x9x6 cm (7x3.5x2.4 inch)
Weight	Panel: 0.16 kg (0.4 lb) Controller: 0.6kg (1.4 lb)

 Bi-Color LED Light



Controller CB250




Durable Soft box

Bracket for quick installation



Enhanced flexible LED Panel



FL250

BI-COLOR FLEXIBLE LED LIGHT **250 W**



FLEXIBLE
LED LIGHT

Highlights

- Daylight to Tungsten Bi-color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

- FL250 * Optional V mount battery plate available <BH-CB250V>

LED Panel	<PN-FL250>	Flexible bi-color panel(250W)
Controller	<CB250>	Controller 250W bi-color
Bracket	<YAS028>	X bracket for CFL/FL250 flexible panel
Snap-in Clamp	<YAS032>	Snap-in clamp set
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Cable	<ECF602>	2m 6pin extension cable
Soft Box	<SB-FL250>	Softbox for 250W flexible
Bag	<QBG015>	Bag for Flexible 250 a unit

Specifications



Light Sources	Bi-Color Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:5,749 2m:1,663 3m:830
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 90x24 cm (35.2x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.5 kg (1 lb) Controller: 1.8 kg (4 lb)

FL800

BI-COLOR FLEXIBLE LED LIGHT **120 W**

Highlights

- Daylight to Tungsten Bi-color LED light
- Enhanced flexible LED Panel
- 60W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Built-in battery mount in controller
- USB 5V output



Model & Kit Component

- **FL800V** * Optional accessories available: Softbox <SB-FL800>, Grid<GD-SB800>

LED Panel	<PN-FL800e>	FL800 Bi-color Panel (120W)
Controller	<FL-DV>	Controller FL400/800 V mount
Bracket	<YAS026>	X bracket for CFL/FL800 flexible panel
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF403>	3m 4pin extension cable
Soft Diffuser	<LD-FL800>	Soft diffuser Set for FL800 (for Flexible Light)
Bag	<QBG012>	Bag for FL800 a unit
- **FL800-3V** *3 light kit available in exclusive bag (QBG015)

Specifications



Light Sources	Bi-Color Flexible LED Panel
Consumption	120 W
Photometric (lux)	1m:2,635 2m:698 3m:348
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 90x24 cm (35.2x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.3 kg (0.6 lb) Controller: 0.5 kg (1 lb)

FL400

BI-COLOR FLEXIBLE LED LIGHT **60W**

Highlights

- Daylight to Tungsten Bi-color LED light
- Enhanced flexible LED Panel
- 60W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Built-in battery mount in controller
- USB 5V output



Model & Kit Component

- **FL400V** * Optional accessories available: Softbox <SB-FL400>, Grid<GD-SB400>

LED Panel	<PN-FL400e>	FL400 Bi-color Panel (60W)
Controller	<FL-DV>	Controller FL400/800 V mount
Bracket	<YAS025>	X bracket for CFL/FL400 flexible panel
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF403>	3m 4pin extension cable
Soft Diffuser	<LD-FL400>	Soft diffuser Set for FL400 (for Flexible Light)
Bag	<QBG011>	Bag for FL400 a unit
- **FL400-3V** * 3 light kit available in exclusive bag (QBG008)



Specifications



Light Sources	Bi-Color Flexible LED Panel
Consumption	60 W
Photometric (lux)	1m:2,204 2m:577 3m:268
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 24x24 cm (9.5x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.15 kg (0.3 lb) Controller: 0.5 kg (1 lb)

CML250B

FULL COLOR METAL LED LIGHT 250 W

Highlights

- RGB full color with white color LED light
- Durable Metal LED Panel with Barndoor
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve



Model & Kit Component

◦ CML250B * Optional V mount battery plate available <BH-CB250V>

LED Panel	<PN-CML250>	Metal 250W RGB color panel (250W)
Controller	<CB250C>	Controller 250W RGB
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF1603>	3m 6 pin extension cable
Barndoor	<BD250>	Barndoor frame set for Metal 250W

Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,711 2m:1,260 3m:644
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)

CML250S

FULL COLOR METAL LED LIGHT **250 W**

Highlights

- RGB full color with white color LED light
- Durable Metal LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve
- Pop up & Foldable Soft box



Model & Kit Component

○ CML250S

* Optional V mount battery plate available <BH-CB250V>

LED Panel	<PN-CML250>	Metal RGB color panel (250W)
Controller	<CB250C>	Controller 250W RGB
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF1603>	3m 6 pin extension cable
Soft Box	<SB-ML250>	Soft box for 250W Metal (quick install)

Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,650 2m:1,046 3m:471
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)


ML250B

BI-COLOR METAL LED LIGHT 250 W



Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve



Model & Kit Component

- ML250B * Optional V mount battery plate available <BH-CB250V>

LED Panel	<PN-ML250>	Metal bi-color panel (250W)
Controller	<CB250>	Controller 250W bi-color
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF602>	2m 6pin cable
Barndoor	<BD250>	Barndoor frame set for Metal 250W

Specifications



Light Sources	Bi-Color Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,466 2m:1,724 3m:531
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight (g)	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)


ML250S

BI-COLOR METAL LED LIGHT 250 W



Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve
- **Pop up & Foldable Soft box**



Model & Kit Component

- **ML250S** * Optional V mount battery plate available <BH-CB250V>

LED Panel	<PN-ML250>	Metal bi-color panel (250W)
Controller	<CB250>	Controller 250W bi-color
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Snap-in Clamp	<YAS032>	Snap-in clamp set
Cable	<ECF602>	2m 6pin cable
Soft Box	<SB-ML250>	Soft box for 250W Metal (quick install)

Specifications



Light Sources	Bi-Color Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,032 2m:892 3m:532
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)

STD250C

FULL COLOR STUDIO LED LIGHT 250 W



Highlights

- RGB full color with white color LED light
- Durable Metal LED Panel with Barndoor
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

- STD250C

LED Panel	<PN-CML250>	Metal RGBWW panel (250W)
Controller	<YAS031>	Controller Studio 250W RGB
Barndoor	<BD250>	Barndoor frame set for Metal 250W

Cinema & Broadcasting Equipment

Specifications

Light Sources	RGBWW Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,424 2m:1,283 3m:619
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions (mm)	Panel: 63x34x0.8 cm (24.9x13.5x0.3 inch) Controller: 42x34x7 cm (17x13.5x2.8 inch)
Weight (g)	Panel: 1.3 kg (2.9 lb) Controller: 2.4 kg (5.3 lb)

STD250


BI-COLOR STUDIO LED LIGHT

250 W



Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- 6 Preset reserve
- USB 5V output / USB Firmware update



Model & Kit Component

○ STD250

LED Panel	<PN-ML250>	Metal bi-color panel (250W)
Controller	<YAS030>	Controller Studio 250W bi-color
Barndoor	<BD250>	Barndoor frame set for Metal 250W

Cineroid®
Cinema & Broadcasting Equipment

Specifications



Light Sources	Bi-Color Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,308 2m:1,250 3m:603
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~30 V
DMX	512 Channels
Dimensions (mm)	Panel: 63x34x0.8 cm (24.9x13.5x0.3 inch) Controller: 42x34x7 cm (17x13.5x2.8 inch)
Weight (g)	Panel: 1.3 kg (2.9 lb) Controller: 2.4 kg (5.3 lb)

LS1600i

BI-COLOR STUDIO LED LIGHT 240W

Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 240W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX



Slim Studio LED Light 15cm in height



Model & Kit Component

- LS1600i

LS1600i Main body
Power Cable
Barndoor
Diffuser
Yoke

Specifications



Light Sources	Bi-Color LED Panel
Consumption	240 W
Photometric (lux)	1m:5,792 2m:1,612 3m:770
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	65x15x3.5 cm (25.6x5.9x1.4 inch)
Weight	3 kg (6.6 lb)

LS800i

BI-COLOR STUDIO LED LIGHT 120W

Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX




Slim Studio LED Light 15cm in height



Model & Kit Component

○ LS800i

- LS800i Main body
- Power Cable
- Barndoor
- Diffuser
- Yoke

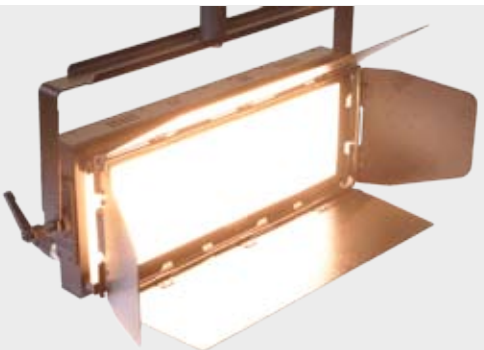

Specifications



Light Sources	Bi-Color LED Panel
Consumption	120 W
Photometric (lux)	1m:2,943 2m:860 3m:410
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	36x15x3.5 cm (14.1x6x1.4 inch)
Weight	1.6 kg (3.5 lb)

Cineroid® PAR LED LIGHT SYSTEM

The CINEROID PAR Light PL120V has been released. Its lens is designed to be used with a more powerful and focused light of 28 degrees. Equipped with a diffuser, it can also be used like a regular LED light including a wide beam angle of 120 degrees.



with Diffuser
18,299 Lux (1m) / 120° Light Angle

without Diffuser
4,056 Lux (1m) / 28° Light Angle

PL120


BI-COLOR PAR LED LIGHT

120 W



Highlights

- PAR LED light Focusing and Powerful
- Convertible normal Light by using diffuser
- Daylight to Tungsten Bi-color LED light
- Durable Metal Body and controller
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- Flicker-Free
- DMX 512 ready with Built-in DMX
- USB 5V output



Model & Kit Component

○ PL120V

LED Panel	<PN-PN120>	Par light 120W bi-color panel
Controller	<FL-DV>	FL-DV :Controller FL400/800 V mount
Yoke	<YAS020>	Yoke for PL120
Cable	<ECF403>	3m 4pin extension cable
Diffuser	<LD-8M>	Diffuser for PL120
AC Adatper	<AC800M>	AC Adapter
Bag	<QBG008>	Bag for FL400 3 sets, PL120

Specifications



Light Sources	Bi-Color LED Panel
Consumption	120 W
Photometric (lux)	(no diffuser) 1m:18,299 2m:6,634 3m:2,617 (with diffuser) 1m:4,056 2m:1,155 3m:578
Light Angle	(without diffuser) 28° (with diffuser) 120°
CRI	95 or above
CCT	2700°K ~ 6500°K
Dimming	0~100%
Power Input	AC 100~240 V / DC 12~24 V
DMX	512 Channels
Dimension	35x30x6.5 cm (13.7x11.8x2.6 inch)
Weight	2 kg (4.3 lb)

LM400

BI-COLOR ALL-IN-ONE LED LIGHT 60 W

Highlights

- All-in-one LED Light
- Durable Metal Body
- Color temperature 2700°K~6500°K
- Handy and compact design
- Snap-in diffuser
- 0~100% dimming
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Compatible with V/G mount battery



Model & Kit Component

○ LM400-VCBB

- LM400-VCe body
- Yoke
- Diffuser
- AC Adapter
- Carrying Bag

* Barndoor is optional item <BD04>

* The tripod is not included in the package.

○ LM400-VCBB

* 3 set contains a bag(QBG009) and 3 other components each.



Specifications



Light Sources	Bi-Color LED Panel
Consumption	60 W
Photometric (lux)	1m:1,514 2m:378 3m:182
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	11~17 V
DMX	512 Channels
Dimensions (mm)	19.1x14.1x2.5cm(7.5x5.6x1 inch)
Weight	0.56 kg (1.3 lb)

SL45



BI-COLOR ALL-IN-ONE LED LIGHT **45 W**

Highlights

- 45W Lighting Power
- Built-in Foldable Softbox
- Color temperature 2700°K~6500°K
- Handy and compact design
- Built-in Controller with dimmer
- CRI 95 or above
- TLCI 98 or above
- 0~100% dimming
- Flicker-Free
- Using RJ45 cable



Model & Kit Component

○ SL45

LED Panel	<PN-TL120>	LED Light Panel with Built-in Softbox
Built-in Controller	<CB-SL45>	Controller for SL45
Adapter	<AC400M>	AC Adapter
Tripod	<LT-8052>	Tripod
Ball Head for Tripod	<XLL044>	Ball Head with 16mm spigot
5 meter Connecting Cable	<FCB066>	5 meter RJ45 Cable x1

Specifications




Light Sources	Bi-Color LED Panel
Consumption	45 W
Dimension	Folded: 280 x 70 x 320 mm
<Panel+Controller+Ball Head>	Spread: 350 x 155 x 320 mm
Weight	895 g (2 lb)
<Panel+Controller+Ball Head>	
Photometric (lux)	1060 / 1 m
Light Angle	130°
CCT	2700°K ~ 6500°K
CRI	95 or above
TLCI	98 or above
Dimming	0~100%
DC Input	12~24 V, Min 150 W

CC4

4 CANNEL CONTEROLLER

Highlights

- Power up 4 x FL400/FL800/PL120 Panels
- 4 Channel with Mono LCD Display
- Master Mode for Grouping
- Dimming from 0~100%
- Color temp 2700°K ~ 6500°K
- 0~100% dimming
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Compatible with V/G mount battery

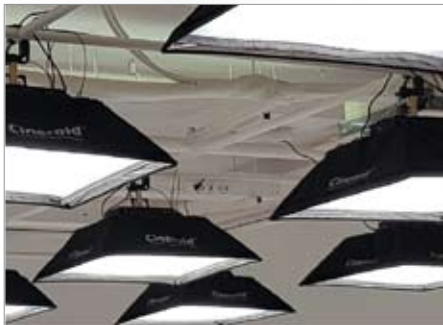

Model & Kit Component

- CC4
 - CC4 Main body
 - ECF403 x4
 - AC Power Cable
- Panel Compatibility
 - PN-FL400e, PN-FL800e,
 - PN-PL120

Specifications



Light Sources	Bi-Color LED Panel
Consumption	60 W
Photometric (lux)	1m:1,514 2m:378 3m:182
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	11~17 V
DMX	512 Channels
Dimensions (mm)	19.1x14.1x2.5cm(7.5x5.6x1 inch)
Weight	0.56 kg (1.3 lb)

TL120

TRIPLE LED LIGHT SET **120W**

Highlights

- 40W LED Light Panel X3
- Built-in Foldable Softbox
- 3 channel Dedicated Controller
- Color temperature 2700°K~6500°K
- Durable Metal Body
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Flicker-Free / Sleep Mode
- 2 Types of ball-heads provided
- Max 10 meter extension



3 Channel Lighting Set



Built-in Foldable Softbox



Model & Kit Component

- TL120 * Optional V mount battery plate available <BH-TL120V>

LED Panel X 3	<PN-TL120>	40W LED Light Panel with Built-in Softbox
Controller	<CB-TL120>	Controller for 3 Channel LED Light TL120
Ball Head with Clamp X2	<QAC023>	Mini Ball-Head with Clamp
Ball Head for Tripod X2	<XLL044>	Ball Head with 16mm spigot
5M Cable X 3	<FCB066>	5 meter RJ45 Cable
Bag	<QBG008>	Carrying Bag for TL120



Specifications



Light Sources	Bi-Color LED Panel
Consumption	45 W
Dimension	LED Panel : 360 x 210 x 135 mm Controller: 115 x 190 x 50 mm
Weight	LED Panel : 450 g Controller: 300 g
Photometric (lux)	950 / 1 m (per each panel)
Light Angle	130°
CCT	2700°K ~ 6500°K
CRI	95 or above
TLCI	98 or above
Dimming	0~100%
DC Input	12~24 V, Min 150 W

LM200

ON-CAMERA LED LIGHT

36 W

Highlights

- Compact Size
- Light weight
- 0~100% dimming
- Color temperature 2700°K~6500°K
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Various Power Options
- Various Accessories Support



Model & Kit Component

◦ LM200-VCD

* Barndoor is optional item <BD02>

LED Light body	<LM200-VC>	Main body
Diffuser	<LD-02>	Diffuser panel for LM200-VC
Battery Mount	<YAS079>	NPF-L battery dual mount
Power Adapter	<PA05>	DC Plug with D-tap Cable
Ball head	<QAC012>	Mini ball head
Carrying Bag	<QBG001>	Carrying bag for LM200-VCD

Specifications



Light Sources	Bi-Color LED Panel
Consumption	36 W
Photometric (lux)	1m:566 2m:196 3m:77
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	6~17 V
Dimensions	15x9x3.5 cm (6x3.5x1.4 inch)
Weight	0.28 kg (0.6 lb)

L10-BC

ON-CAMERA LED LIGHT

18 W

Highlights

- Compact Size
- Light weight
- 0~100% dimming
- Color temperature 2700°K~6500°K
- Digital Display
- Flicker-Free
- Various Power Options
- Silent Cooling System
- Various Power Options
- Various Accessories Support



Model & Kit Component

○ L10C-BC

LED Light	<L10-BC>	Main body
Battery Mount	<YCS048>	L10-BC Battery mount for NPF L
Ball head	<QAC012>	Mini ball head

Cineroid®
Cinema & Broadcasting Equipment

Specifications



Light Sources	Bi-Color LED Panel
Consumption	18 W
Photometric (lux)	1m:296
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	6~17 V
Dimensions	9.2x8.2x2.5 cm (3.6x3.2x1 inch)
Weight	0.16 kg (0.4 lb)



DB001U

DMX BRIDGE



Highlights

- Powered by USB
- USB A type 5V output
- XLR 5pin DMX port
- DMX512 signal compatible
- RJ45 Jack DMX port
- Durable metal case



Multiple Cineroid lights installed in the studio



DMX Bridge connected to computer for lighting control

Model & Kit Component

- DB001U
 - DMX bridge body
 - USB C cable
 - Manual
 - Uni-Studio software
- Compatibility Cineroid Light

CFL Series	CFL250, CFL800, CFL400
FL Series	FL250, FL800, FL800
Studio Light	CML250, ML250
	STD250C, STD250
	LS1600i, LS800i
Par Light	PL120V

Specifications

Output signal	DMX512
Dimension	11.5x10x4 cm(4.5x4x1.5 inch)
Weight	250 g (0.6 lb)
DMX port	XLR 5pin and RJ45 jack
Power input	5 V
USB connector	C type
USB power output	5 V



UNI STUDIO

CINEROID INTEGRATED LIGHTING CONTROL SOFTWARE

UNI STUDIO is an integrated control software that allows computer control of Cineroid lighting equipment. Set the channel with Cineroid's DMX feature. Control multiple Cineroid lighting units quickly and easily while viewing the screen on a PC monitor instead of a DMX encoder. This program is used in conjunction with Cineroid Bridge.



- Control all lights on your finger
- Random colour effect
- Special effect with customizing function
- Data pre-set and recall
- Project base configuration



Control Lights group



Special effect programming and run



Random play

This software only runs on Windows. You can get it by accessing the CINEROID website. Mac and mobile versions will be developed later.

www.cineroid.com

Barndoor



BD250 : Barndoor for PN-ML250 / CML250



BD08M
Barndoor for PL120



BD04
Barndoor for LM400



BD02
Barndoor for LM200



BD01
Barndoor for L10-BC

Soft Box



Pop up & Foldable



SB-ML250 : Softbox for CML250 / ML250



SB-FL250
Softbox for CFL250 / FL250



SB-FL800
Softbox for FL800 / CFL800



INTRODUCTION
VIDEO



SB-FL400
Softbox for FL400 / CFL400



SB-LM400
Soft box for LM400



INTRODUCTION
VIDEO

Diffuser



LD-11

: Diffuser for L10



LD-FL400

: Soft diffuser Set for FL400



LD-FL800

: Soft diffuser Set for FL800 (ML800 / CL800)

Grid Box



GD-FL250 : Grid for SB-FL250

Grid for Diffuser



GD-FL400

: Grid for LD-FL400



GD-FL800

: Grid for LD-FL800

Grid for Softbox



GD-LM400

: Grid for SB-SM400



GD-SB400

: Grid for SB-FL400



GD-SB800

: Grid for SB-FL800



GD-ML250

: Grid for SB-ML250

Accessoires

Extension Cable



ECF1603 : 3m 6 pin extension cable for CML250 / CFL250



ECF403
3m 4 pin extension cable
for FL400 / FL800 / PL120



ECF405
5m 4 pin extension cable
for FL400 / FL800 / PL120



ECF602
2m 6 pin extension cable
for CFL400 / CFL800
FL250 / ML250




ECF605
5m 6 pin extension cable
for CFL400 / CFL800
FL250 / ML250

Snap-in Clamp



YAS032 : Snap-in Clamp for Cineroid LED Light controller



Applied to FL-DV



Applied to CB250C

Ball Head & Hand Grip



HG-LM1600 : Hand grip mount



XLL044
1/4" Screw Mount
Ball head with 16mm spigot



BL-LM1600S
Ball head with 16mm spigot



BL-LM1600R
Ball head with Rod

Power Adapter



PA06 : 2 pin with D-tap for FL-DV, CL-DV



PA04
mini XLR to D-tap Cable
for EVF4/RVW/PG32e



PA05
DC Plug with D-tap Cable
for LM400/LM200



FCB043
DC plug with D-tap cable
for L10BC



FCB044
DC plug only cable

Battery Mount & Adapter



BH-CB250

: 250W controller V mount plate



BH-TL120V
V battery mount
for TL120V



YCS048
L10BC battery mount
for NPF L series



BH-LM400V
V battery mount for
LM400



BH-LM400G
G battery mount for
LM400



AC800
12V 12.5A Adapter
with DC plug



AC800M
12V 12.5A Adapter
with 2 pin plug



AC400
16V 4.5A Adapter
with DC plug



AC400M
16V 4.5A Adapter
with 2 pin plug

Bag



QBG009

: Carrying bag for LM400 3 units



QBG001
Carrying bag for
EVF4RVW, LM200



QBG004
Carrying bag for
DL50/LM400



QBG008
Carrying bag for
TL120/PL120/FL400 3 Set



QBG011
Carrying bag for
FL400 single set



QBG012
Carrying bag for
FL800 single set



QBG015
Carrying bag for
FL800 3 set/FL250/CFL250

Cineroid LED Light Configuration

Flexible LED Light

★ Optional item (purchase separately)

Model	LED Panel	Controller	Diffuser	Softbox	Grid	Bracket & Ball head	Cable	V-Mount	Bag
CFL250 	PN-CFL250 	CB250C 	-	SB-FL1600 	GD-FL250 ★ 	YAS028 	ECF1603 	BH-CB250V ★ 	QBG015 
FL250 	PN-FL250 	CB250 				BL-LM1600S 	ECF602 		
CFL800V 	PN-CFL800e 	CL-DV 			GD-FL800 ★ 	YAS026 	ECF605 ★ 	Embedded in Controller	QBG012 
FL800V 	PN-FL800e 	FL-DV 	LD-FL800 	SB-FL800 ★ 	GD-SB800 ★ 				
CFL400V 	PN-CFL400e 	CL-DV 	LD-FL400 		GD-FL400 ★ 	YAS025 	ECF403 	Embedded in Controller	QBG011 
FL400V 	PN-FL400e 	FL-DV 		SB-FL400 ★ 	GD-SB400 ★ 		ECF405 ★ 		

Metal LED Light

★ Optional item (purchase separately)

Model	Barndoor	Soft box	Grid	LED Panel	Controller	Cable	Bracket	Ball head	V-Mount
CML250B 	BD250 	-	-	PN-CML250 	CB250C 	ECF1603 	YAS029 	BL-LM1600S 	BH-CB250V ★ 
CML250S 	-	SB-ML250 	GD-ML250 ★ 						
ML250B 	BD250 	-	-	PN-ML250 	CB250 	ECF602 			
ML250S 	-	SB-ML250 	GD-ML250 ★ 						

Cineroid[®]

Cinema & Broadcasting Equipment

(주)시큐라인

Tel. (070)4347.4901 Fax. (070)4347.4999 E-mail. support@secu-line.com
서울특별시 구로구 디지털로33길 11 에이스테크노타워 8차 1105호 08380

SECULINE CO., Ltd

Tel. +82.70.4347.4901 Fax. +82.70.4347.4999 E-mail. support@secu-line.com
Rm 1105, Ace techno tower 8th, 11, Digital-ro 33-gil, Guro-gu,
Seoul, Republic of Korea 08380

