

# Cineroid®

Cineroid All Products : 2022 3<sup>rd</sup> Edition

ROLLABLE LIGHT RCA1000 RCC500

FLEXIBLE LIGHT FCA250V FCC250V FCB120V

STUDIO LIGHT MCB1000B MCA500B MCB250B MCB250S LS1600i LS800i

CREATORS LIGHT SL45 TL120



## Cineroid LED Light Naming Rule



<b>R</b> Rollable	<b>B</b> Bi-Color	<b>A</b> Square	1000 W	<b>V</b> V-battery mount
<b>F</b> Flexible	<b>C</b> Full Color	<b>B</b> Rectangular	500 W	<b>B</b> Barndoor
<b>M</b> Metal		<b>C</b> Wide	250 W	<b>S</b> Softbox
			120 W	
			-	

EX) Rollable, Full Color, Square, 1000 W : RCA1000  
 Flexible, Full Color, Rectangular, 120W, V-battery mount : FCB120V

## LED LIGHT

Rollable	1kW	RCA1000	4
<b>Jupiter</b>	500W	RCC500	5
Flexible	250W	FCA250V	6
<b>Saturn</b>	250W	FCC250V	8
	120W	FCB120V	10
Studio	1kW	MCB1000B	12
<b>Venus</b>	500W	MCA500B	14
	250W	MCB250B	16
Studio	250W	MCB250S	17
	240W	LS1600i	18
	120W	LS800i	19
Creators	45W	SL45	20
	120W	TL120	21

## Synchro Light

High Speed Synchronization Light Module	24
---	----

## Studio Solution

DMX Bridge	22
Uni Software	23

## ACCESSOIRES

Barn Door / Soft Box	26
Diffuser / Grid Box	27
Extension Cable	28
Snap-in Clamp	28
Ball Head / Hand Grip	29
Power Adapter	29
Battery Mount / Adapter	30
Bag	30


# Jupiter 1000



FULL COLOR ROLLABLE LED LIGHT **1000 W**

## Highlights

- 1000W ultra powerful lighting
- RGB full color with white color LED light
- Rollable LED Light Panel
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair

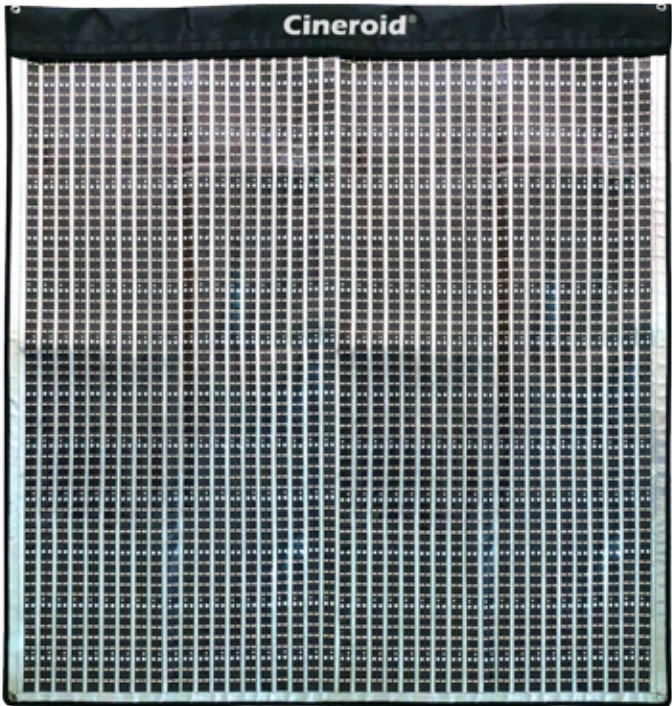

## Model & Kit Component

○ RCA1000	
LED Panel	1000W Rollable RGBWW panel
Controller	Controller
Bracket	Bracket for 1000W rollable panel
Ball Head	Quick mount ball head with spigot
Cable	3m extension cable
Soft Box	Softbox for 1000W Rollable panel

## Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	1000 W
Photometric (lux)	1m:24,000 2m:7,168 3m:3,500
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	110 / 240 V
DMX	512 Channels
Dimensions	Panel: 120x120 cm (47.2x47.2 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.9 kg (4.2 lb) Controller: 2.0 kg (4.4 lb)

# Jupiter 500



FULL COLOR ROLLABLE LED LIGHT **500 W**

## Highlights

- 500W ultra powerful lighting
- RGB full color with white color LED light
- Rollable LED Light Panel
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- New panel mechanism for easy repair



## Model & Kit Component

○ RCC500	
LED Panel	500W RGBWW rollable panel
Controller	Controller
Bracket	Bracket for 500W rollable panel
Ball Head	Quick mount ball head with spigot
Cable	3m extension cable
Soft Box	Softbox for 500W rollable panel

## Specifications



Light Sources	RGBWW Rollable LED Panel
Consumption	500 W
Photometric (lux)	1m:12,000 2m:3,584 3m:1,750
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	110 /240 V
DMX	512 Channels
Dimensions	Panel: 120x63 cm (46.9x24.8 inch) Controller: 16x9x28 cm (6.3x3.5x11 inch)
Weight	Panel: 0.9 kg (2.0 lb) Controller: 1.8 kg (4 lb)



FLEXIBLE  
LED LIGHT



New 250W Controller



RGBWW full color with white



Controller with built-in double battery mount



Durable soft box




# Saturn 250 Square

FULL COLOR FLEXIBLE LED LIGHT

250 W

## Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- 14.4V and 26V multi support for V mount battery

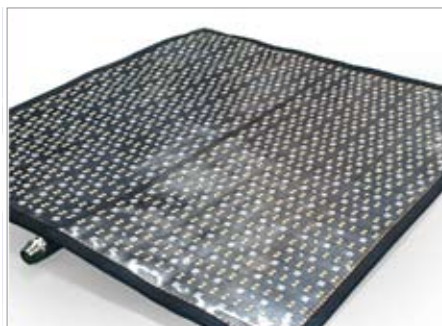

## Model & Kit Component

◦ FCA250V		
LED Panel		Flexible RGBWW panel (250W)
Controller		Controller 250W RGBWW
Bracket		X bracket for FCA250 flexible panel
Snap-in Clamp		Snap-in clamp set
Cable	<ECF1603>	3m 6 pin extension cable
Soft Box		Softbox for 250W flexible

## Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	DC 24 V
DMX	512 Channels
Dimensions	Panel: 46x46 cm (18.1x18.1 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.45 kg (1.0 lb) Controller: 1.8 kg (4 lb)

# FLEXIBLE

LED LIGHT



RGBWW full color with white



Bracket for quick installation



Durable soft box

New 250W Controller





# Saturn 250 Wide

FULL COLOR FLEXIBLE LED LIGHT

250W

## Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- 14.4V and 26V multi support for V mount battery



## Model & Kit Component

### ○ FCC250V

LED Panel	Flexible RGBWW panel (250W)
Controller	Controller 250W RGBWW
Bracket	<YAS028> X bracket for CFL/FL250 flexible panel
Snap-in Clamp	Snap-in clamp set
Ball Head	<BL-LM1600S> Quick mount ball head with Spigot
Cable	<ECF1603> 3m 6 pin extension cable
Soft Box	<SB-FL250> Softbox for 250W flexible

\* V battery mount is optional item <BH-CB250V>

## Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	250 W
Photometric (lux)	1m:6,024 2m:1,752 3m:875
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	DC 24 V
DMX	512 Channels
Dimensions	Panel: 90x24 cm (35.2x9.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 0.6 kg (1.3 lb) Controller: 1.8 kg (4 lb)

**FLEXIBLE**  
LED LIGHT



RGBWW full color with white



Enhanced flexible light panel



Controller with built-in battery mount



RGBWW LED Light panel



# Saturn 120

FULL COLOR FLEXIBLE LED LIGHT **120W**

## Highlights

- RGB full color with white color LED light
- Enhanced flexible LED Panel
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update
- Remote control via Bluetooth using the Cineroid app



## Model & Kit Component

### ○ FCB120V

LED Panel		RGB Flexible Panel (120W)
Controller	<CL-DV>	Controller CFL400/800 with V mount
Bracket	<YAS026>	X bracket for CFL/FL800 flexible panel
Snap-in Clamp		Snap-in Clamp set
Cable	<ECF602>	2m 6pin extension cable
Soft Diffuser	<LD-FL800>	Soft diffuser Set for FL800 ( for Flexible Light)
AC Adapter	<AC800>	AC Adapter for FCB120V

## Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	120 W
Photometric (lux)	1m:2,806 2m:829 3m:381
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
DC Input	12~24 V
DMX	512 Channels
Dimensions	Panel: 46x24 cm (18.1x9.5 inch) Controller: 18x9x6 cm (7x3.5x2.4 inch)
Weight	Panel: 0.3 kg (0.7 lb) Controller: 0.6 kg (1.4 lb)

**1KW**  
**ULTRA POWER**



1000W Ultra Power Lighting



RGBWW full color with white



Built-in Dedicated Controller



Built-in V-Battery mount X4



# Venus1000


ULTRA POWER RGBWW STUDIO LIGHT **1000 W**

## Highlights

- 1000W ultra powerful studio light
- RGB full color with white color LED light
- Durable metal body
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update



- MCB1000B

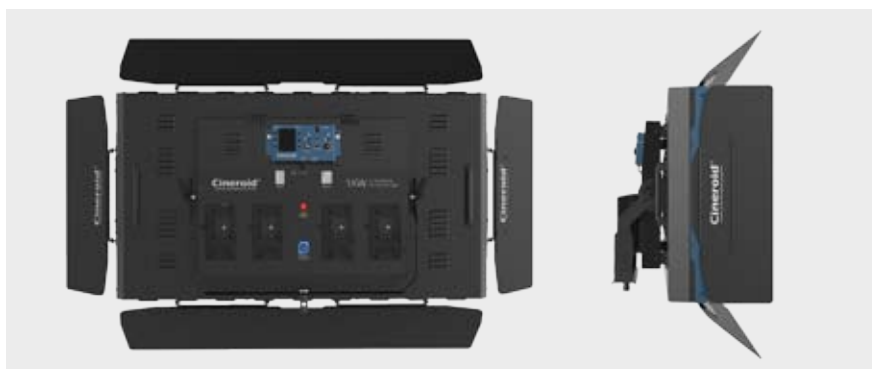

## Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	1000 W
Photometric (lux)	1m:24,000 2m:7,168 3m:3,500
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	220 V
DMX	512 Channels
Dimensions	100x57x19 cm 39.4x22.4x7.4 inch
Weight	21 kg 46.2 lb



**500W**  
**ULTRA POWER**



500W Ultra Power Lighting



RGBWW full color with white



Built-in Dedicated Controller



Built-in V-Battery mount X2




# Venus 500


ULTRA POWER RGBWW STUDIO LIGHT **500 W**

## Highlights

- 500W ultra powerful studio light
- RGB full color with white color LED light
- Durable metal body
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2,700°K~6,500°K
- DMX 512 ready with Built-in DMX
- Custom effect / 6 Preset reserve
- USB 5V output / USB Firmware update

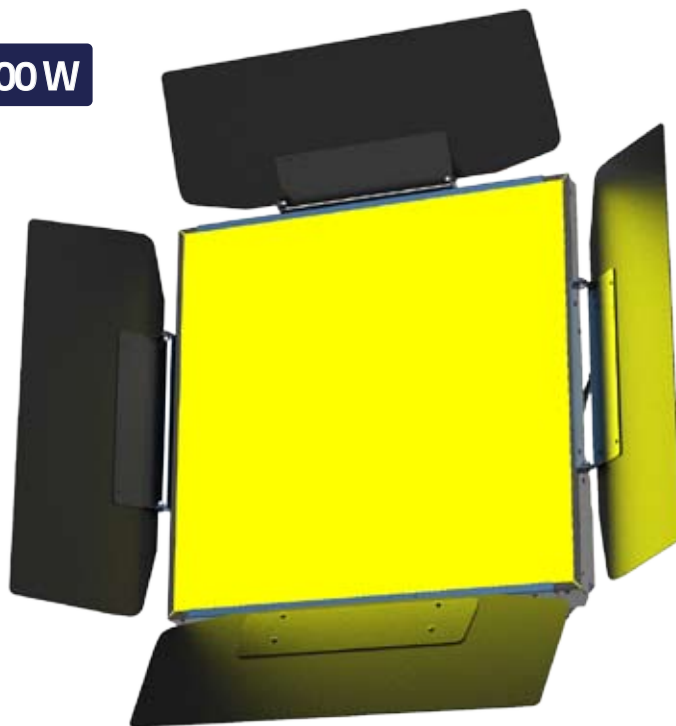

- MCA500B

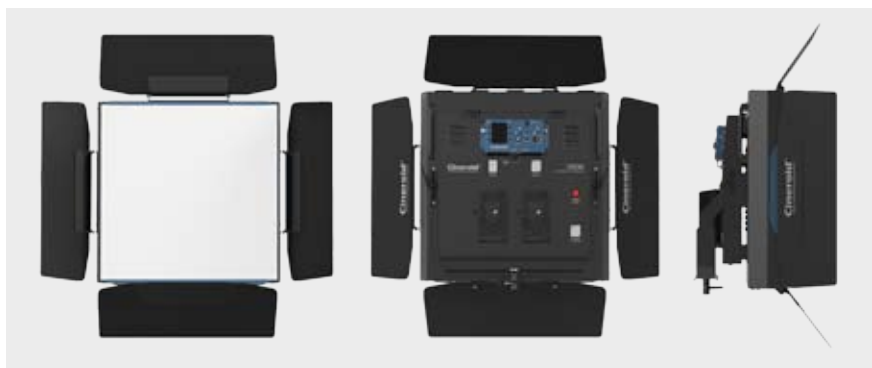

## Specifications



Light Sources	RGBWW Flexible LED Panel
Consumption	500 W
Photometric (lux)	1m:12,000 2m:3,584 3m:1,756
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	220 V
DMX	512 Channels
Dimensions	53x53x17 cm 20.8x20.8x6.2 inch
Weight	10 kg 22 lb

# Venus250 Barndoor

FULL COLOR METAL LED LIGHT

250 W



## Highlights

- RGB full color with white color LED light
- Durable Metal LED Panel with Barndoor
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve



## Model & Kit Component

### ◦ MCB250B

LED Panel	<PN-CML250>	Metal 250W RGB color panel (250W)
Controller	<CU250>	Controller 250W RGB
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Cable	<ECF1603>	3m 6 pin extension cable
Barndoor	<BD250>	Barndoor frame set for Metal 250W

## Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,711 2m:1,260 3m:644
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)

# Venus250 Softbox

FULL COLOR METAL LED LIGHT

250W



## Highlights

- RGB full color with white color LED light
- Durable Metal LED Panel
- 250W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Color temperature 2700°K~6500°K
- DMX 512 ready with Built-in DMX
- USB 5V output / USB Firmware update
- 6 Preset reserve
- **Pop up & Foldable Soft box**



## Model & Kit Component

### ○ MCB250S

LED Panel	<PN-CML250>	Metal RGB color panel (250W)
Controller	<CU250>	Controller 250W RGB
Bracket	<YAS029>	H bracket for CML/ML250 metal panel
Ball Head	<BL-LM1600S>	Quick mount ball head with Spigot
Cable	<ECF1603>	3m 6 pin extension cable
Soft Box	<SB-ML250>	Soft box for 250W Metal (quick install)

## Specifications



Light Sources	RGBWW Metal LED Panel
Consumption	250 W
Photometric (lux)	1m:4,650 2m:1,046 3m:471
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V
DMX	512 Channels
Dimensions	Panel: 63x34 cm (24.9x13.5 inch) Controller: 27x17x8 cm (10.5x6.5x3 inch)
Weight	Panel: 1.3 kg (2.9 lb) Controller: 1.8 kg (4 lb)

# LS1600i

BI-COLOR STUDIO LED LIGHT 240W

## Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 240W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX



Slim Studio LED Light 15cm in height



## Model & Kit Component

- LS1600i

LS1600i Main body
Power Cable
Barndoor
Diffuser
Yoke

## Specifications



Light Sources	Bi-Color LED Panel
Consumption	240 W
Photometric (lux)	1m:5,792 2m:1,612 3m:770
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	65x15x3.5 cm (25.6x5.9x1.4 inch)
Weight	3 kg (6.6 lb)



# LS800i

BI-COLOR STUDIO LED LIGHT

120W

## Highlights

- Tungsten to Daylight Bi-Color LED light
- Durable Metal LED Panel with Barndoor
- 120W powerful lighting
- Flicker-Free
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Built-in controller in body
- Color temperature 2700°K~6500°K
- Silent Cooling System
- DMX 512 ready with Built-in DMX



Slim Studio LED Light 15cm in height



## Model & Kit Component

### ○ LS800i


LS800i Main body

Power Cable

Barndoor

Diffuser

Yoke

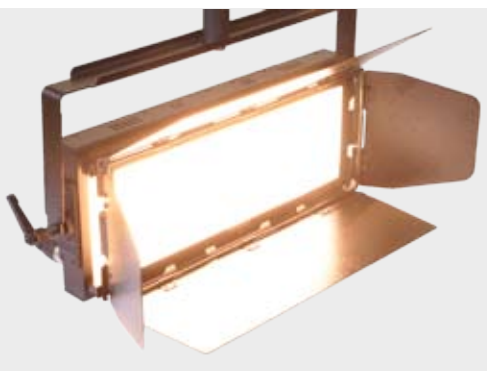

## Specifications



Light Sources	Bi-Color LED Panel
Consumption	120 W
Photometric (lux)	1m:2,943 2m:860 3m:410
CRI	95 or above
CCT	2700°K ~ 6500°K
Light Angle	140°
Dimming	0~100%
Power Input	AC 100~240 V / DC 24 V
DMX	512 Channels
Dimensions	36x15x3.5 cm (14.1x6x1.4 inch)
Weight	1.6 kg (3.5 lb)

# SL45



BI-COLOR ALL-IN-ONE LED LIGHT 45 W

## Highlights

- 45W Lighting Power
- Built-in Foldable Softbox
- Color temperature 2700°K~6500°K
- Handy and compact design
- Built-in Controller with dimmer
- CRI 95 or above
- TLCI 98 or above
- 0~100% dimming
- Flicker-Free
- Using RJ45 cable



## Model & Kit Component

○ SL45		
LED Panel	<PN-TL120>	LED Light Panel with Built-in Softbox
Built-in Controller	<CB-SL45>	Controller for SL45
Adapter	<AC400M>	AC Adapter
Tripod	<LT-8052>	Tripod
Ball Head for Tripod	<XLL044>	Ball Head with 16mm spigot
5 meter Connecting Cable	<FCB066>	5 meter RJ45 Cable x1

## Specifications



Light Sources	Bi-Color LED Panel
Consumption	45 W
Dimension	Folded: 280 x 70 x 320 mm
<Panel+Controller+Ball Head>	Spread: 350 x 155 x 320 mm
Weight	895 g (2 lb)
<Panel+Controller+Ball Head>	
Photometric (lux)	1060 / 1 m
Light Angle	130°
CCT	2700°K ~ 6500°K
CRI	95 or above
TLCI	98 or above
Dimming	0~100%
DC Input	12~24 V, Min 150 W

# TL120

TRIPLE LED LIGHT SET **120W**

## Highlights

- 40W LED Light Panel X3
- Built-in Foldable Softbox
- 3 channel Dedicated Controller
- Color temperature 2700°K~6500°K
- Durable Metal Body
- CRI 95 / TLCI 98 or above
- 0~100% dimming
- Flicker-Free / Sleep Mode
- 2 Types of ball-heads provided
- Max 10 meter extension



3 Channel Lighting Set



Built-in Foldable Softbox



Discription TL120

## Model & Kit Component

- TL120
- | Model                   | Component  | Description                               |
|-------------------------|------------|---|
| LED Panel X 3           | <PN-TL120> | 40W LED Light Panel with Built-in Softbox |
| Controller              | <CB-TL120> | Controller for 3 Channel LED Light TL120  |
| Ball Head with Clamp X2 | <QAC023>   | Mini Ball-Head with Clamp                 |
| Ball Head for Tripod X2 | <XLL044>   | Ball Head with 16mm spigot                |
| 5M Cable X 3            | <FCB066>   | 5 meter RJ45 Cable                        |
| Adapter                 | <AC800>    | Power Adapter                             |
| Bag                     | <QBG008>   | Carrying Bag for TL120                    |

\* Optional V mount battery plate available <BH-TL120V>



## Specifications



Light Sources	Bi-Color LED Panel
Consumption	45 W
Dimension	LED Panel : 360 x 210 x 135 mm Controller: 115 x 190 x 50 mm
Weight	LED Panel : 450 g Controller: 300 g
Photometric (lux)	950 / 1 m (per each panel)
Light Angle	130°
CCT	2700°K ~ 6500°K
CRI	95 or above
TLCI	98 or above
Dimming	0~100%
DC Input	12~24 V, Min 150 W


# DB001U

## DMX BRIDGE



### Highlights

- Powered by USB
- USB A type 5V output
- XLR 5pin DMX port
- DMX512 signal compatible
- RJ45 Jack DMX port
- Durable metal case

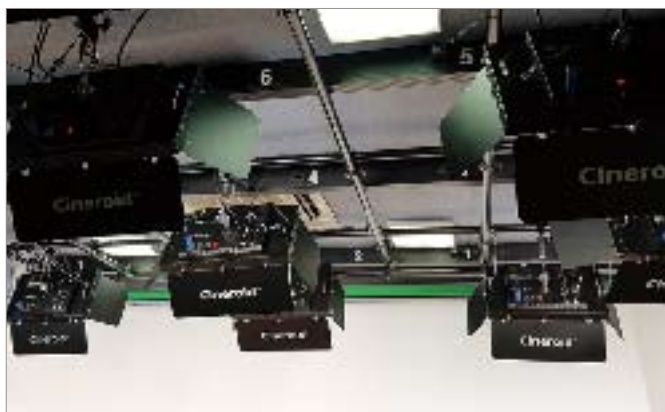

Multiple Cineroid lights installed in the studio



DMX Bridge connected to computer for lighting control

### Model & Kit Component

#### ○ CC4

DMX bridge body

USB C cable

Manual

Uni-Studio software

#### ○ Compatibility Cineroid Light

CFL Series CFL250, CFL800, CFL400

FL Series FL250, FL800, FL800

Studio Light CML250, ML250

STD250C, STD250

LS1600i, LS800i

Par Light PL120V

### Specifications

Output signal	DMX512
Dimension	11.5x10x4 cm(4.5x4x1.5 inch)
Weight	250 g (0.6 lb)
DMX port	XLR 5pin and RJ45 jack
Power input	5 V
USB connector	C type
USB power output	5 V



# UNI STUDIO

## CINEROID INTEGRATED LIGHTING CONTROL SOFTWARE

UNI STUDIO is an integrated control software that allows computer control of Cineroid lighting equipment. Set the channel with Cineroid's DMX feature. Control multiple Cineroid lighting units quickly and easily while viewing the screen on a PC monitor instead of a DMX encoder. This program is used in conjunction with Cineroid Bridge.



- Control all lights on your finger
- Random colour effect
- Special effect with customizing function
- Data pre-set and recall
- Project base configuration



Control Lights group



Special effect programming and run



Random play


This software only runs on Windows. You can get it by accessing the CINEROID website. Mac and mobile versions will be developed later.

[www.cineroid.com](http://www.cineroid.com)



# High speed synchronization full color light module

**Cineroid®**

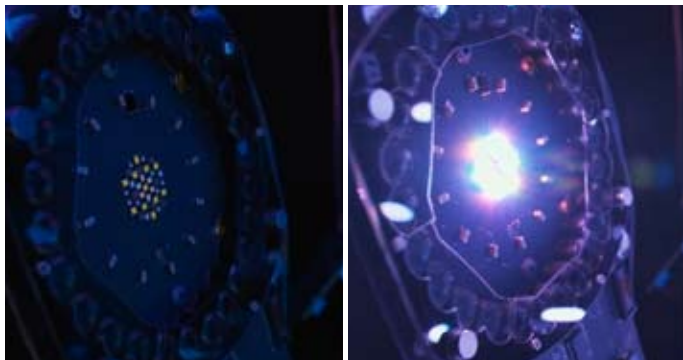

- RGB and White/Warm color light
- Control: High speed linear system with full flicker free
- Power output: 10W or more
- RS485 based high speed : 256 Kbit/s ~ 1Mbit/s
- Embedded signal repeating system
- Error correction system
- 1 line TTL signal level
- 4096 dimming step
- Power connection: 24V daisy chain (DC in and out)



# Get Started on **Cineroid®** App



It can be used to control some lighting products CINEROID using the cineroid application. It connects by bluetooth. The Cineroid app provides product information, documentation, and more. You can download it from Google Play for Android and the App Store for iPhone.



## Barndoor



BD250 : Barndoor for PN-ML250 / CML250



BD08M  
Barndoor for PL120



BD04  
Barndoor for LM400



BD02  
Barndoor for LM200



BD01  
Barndoor for L10-BC

## Soft Box



SB-ML250 : Softbox for CML250 / ML250



SB-FL250  
Softbox for CFL250 / FL250



SB-FL800  
Softbox for FL800 / CFL800



SB-FL400  
Softbox for FL400 / CFL400



SB-LM400  
Soft box for LM400

## Diffuser



**LD-11**

: Diffuser for L10



**LD-FL400**

: Soft diffuser Set for FL400



**LD-FL800**

: Soft diffuser Set for FL800 (ML800 / CL800)

## Grid Box



**GD-FL250** : Grid for SB-FL250

### Grid for Diffuser



**GD-FL400**

: Grid for LD-FL400



**GD-FL800**

: Grid for LD-FL800

### Grid for Softbox



**GD-LM400**

: Grid for SB-SM400



**GD-SB400**

: Grid for SB-FL400



**GD-SB800**

: Grid for SB-FL800



**GD-ML250**

: Grid for SB-ML250

# Accessoires

## Extension Cable



ECF1603 : 3m 6 pin extension cable for CML250 / CFL250



ECF403  
3m 4 pin extension cable  
for FL400 / FL800 / PL120



ECF405  
5m 4 pin extension cable  
for FL400 / FL800 / PL120



ECF602  
2m 6 pin extension cable  
for CFL400 / CFL800  
FL250 / ML250



ECF605  
5m 6 pin extension cable  
for CFL400 / CFL800  
FL250 / ML250

## Snap-in Clamp



YAS032 : Snap-in Clamp for Cineroid LED Light controller





## Ball Head & Hand Grip



HG-LM1600 : Hand grip mount



XLL044  
1/4" Screw Mount  
Ball head with 16mm spigot



BL-LM1600S  
Ball head with 16mm spigot



BL-LM1600R  
Ball head with Rod

## Power Adapter



PA06 : 2 pin with D-tap for FL-DV, CL-DV



PA04  
mini XLR to D-tap Cable  
for EVF4/RVW/PG32e



PA05  
DC Plug with D-tap Cable  
for LM400/LM200



FCB043  
DC plug with D-tap cable  
for L10BC



FCB044  
DC plug only cable  
for L10BC

## Battery Mount & Adapter



**BH-CB250**

: 250W controller V mount plate



**BH-TL120V**  
V battery mount  
for TL120V



**YCS048**  
L10BC battery mount  
for NPF L series



**BH-LM400V**  
V battery mount for  
LM400



**BH-LM400G**  
G battery mount for  
LM400



**AC800**  
12V 12.5A Adapter  
with DC plug



**AC800M**  
12V 12.5A Adapter  
with 2 pin plug



**AC400**  
16V 4.5A Adapter  
with DC plug



**AC400M**  
16V 4.5A Adapter  
with 2 pin plug

## Bag



**QBG009**

: Carrying bag for LM400 3 units



**QBG001**  
Carrying bag for  
EVF4RVW, LM200



**QBG004**  
Carrying bag for  
DL50/LM400



**QBG008**  
Carrying bag for  
TL120/PL120/FL400 3 Set



**QBG011**  
Carrying bag for  
FL400 single set



**QBG012**  
Carrying bag for  
FL800 single set



**QBG015**  
Carrying bag for  
FL800 3 set/FL250/CFL250

**Cineroid<sup>®</sup>**  
Cinema & Broadcasting Equipment

# Cineroid<sup>®</sup>

Cinema & Broadcasting Equipment

(주)시큐라인

Tel. (070)4347.4901 Fax. (070)4347.4999 E-mail. support@secu-line.com  
서울특별시 구로구 디지털로33길 11 에이스테크노타워 8차 1105호 08380

SECULINE CO., Ltd

Tel. +82.70.4347.4901 Fax. +82.70.4347.4999 E-mail. support@secu-line.com  
Rm 1105, Ace techno tower 8th, 11, Digital-ro 33-gil, Guro-gu,  
Seoul, Republic of Korea 08380

